

OPW INSTRUCTIONS

OPW 38-C (0038), 38-CS (0380) CO-AXIAL ADAPTORS

INSTALLATION INSTRUCTIONS

The OPW 38-C & 38-CS Co-Axial Adaptors are shipped from the factory ready for mounting connection to the vapor line, product line and the co-axial hose. No adjustments are necessary before installation.

INSTALLATION:

- Mount the adaptor (flanges are pre-drilled).
- Apply pipe sealant to the male thread of the fuel line. (Do not use plastic tape.) Install and tighten the fuel line into the inlet marked "Fuel" (3/4 female NPT). Do not overtighten or casting may crack resulting in an unsafe condition.
- Install and tighten the vapor line in the same manner. (3/4 female NPT.) (marked "Vapor".)
- Connect the co-axial hose to the outlet of the adaptor. Care must be exercised not to damage or dislodge the two (2) seal rings inside the fuel passage. Tighten the hose nut to 50-75 foot-pounds torque. Pipe sealant is not necessary on the threads. (Do not use plastic tape.)

WARNING: Special attention must be given to these connections to be sure that the fuel line is connected to the side marked FUEL and the vapor line is connected to the side marked VAPOR. Failure to connect the line to the proper inlet will result in spillage when the pumping system is turned on.


Nozzle, adaptor, and hose assembly must be tested for proper operation on your dispensing system prior to putting into service.

WARNING:


KEEP GASOLINE AWAY FROM YOUR EYES AND SKIN
Gasoline may cause eye and skin irritation.

- NEVER use gasoline to wash your hands.
- If you get gasoline on your skin, wash promptly with soap and water or use a waterless cleaner.
- If you get gasoline in your eyes, flush the eyes for 15 minutes with clean water.
- Remove gasoline-soaked clothing and launder before reusing.

Keep Gasoline Where Children Cannot Reach It.



38-C



38-CS

OPW warrants that products sold by it are free from defects in materials and workmanship for a period of one year from the date of manufacture by OPW (ECO products two years from date of manufacture.) Proof of purchase may be required. As the exclusive remedy under this limited warranty, OPW will at its sole discretion, repair, replace, or issue credit for future orders on any product that may prove defective within the one year date of manufacture period (repairs, replacements, or credits may be subject to prorated warranty for remainder of the original warranty period, complete proper warranty claim documentation required.) This warranty shall not apply to any product that has been altered in any way, which has been repaired by any other than a service representative authorized by OPW, or when failure is due to misuse, or improper installation or maintenance. OPW shall have no liability whatsoever for special, incidental, or consequential damages to any party, and shall have no liability for the cost of labor, freight, excavation, clean-up, downtime, removal, reinstallation, loss of profit, or any other cost or charges. THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND SPECIFICALLY THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF.


WARNING: OPW products should be used in compliance with applicable federal, state and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and material to be handled. OPW MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE.

Remember: Safety is everyone's business. Never smoke, allow open flame, or sparking devices near your product dispensers.

OPW 
A DOVER COMPANY

P.O. Box 405003 - Cincinnati, Ohio 45240-5003
(513) 870-3219 - (800) 422-2525 (orders only)
(513) 870-3100 (other calls)

TYPICAL ISLAND MOUNT

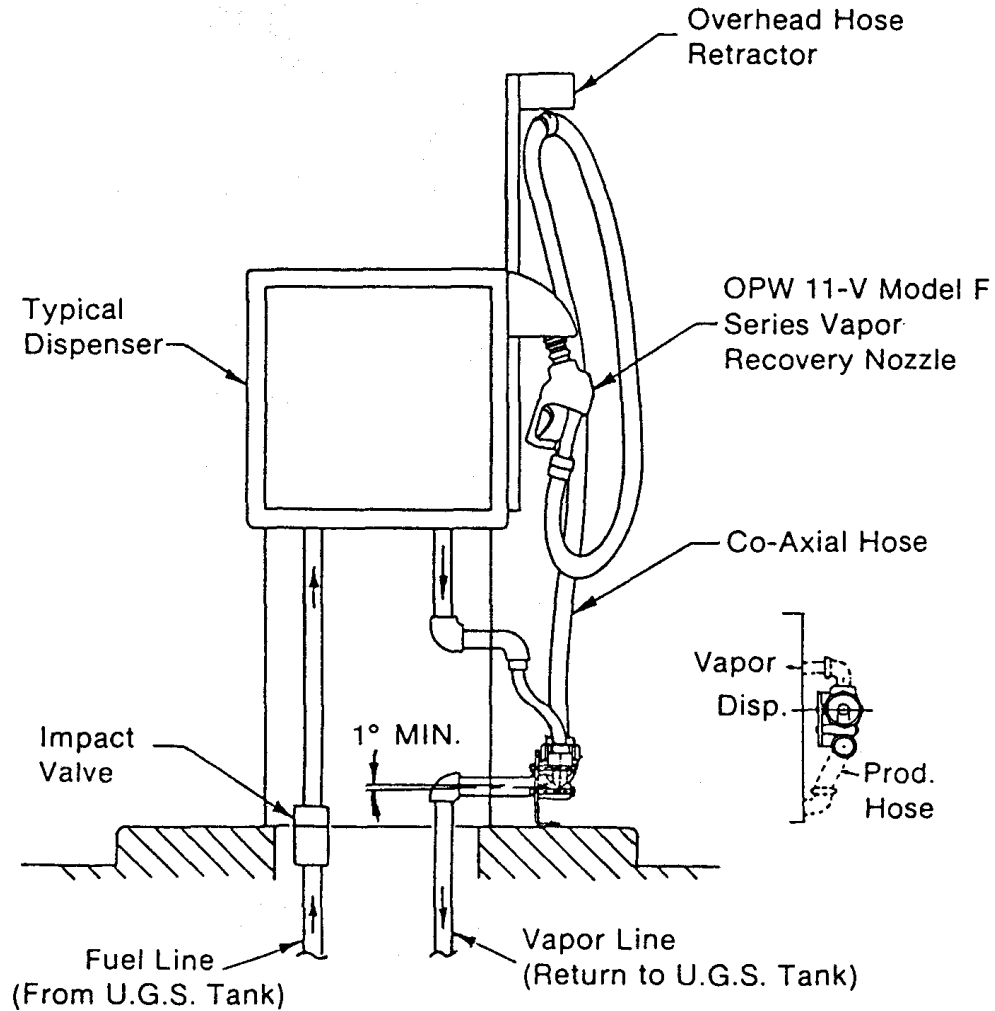

P.O. Box 405003 - Cincinnati, Ohio 45240-5003
(513) 870-3219 - (800) 422-2525 (orders only)
(513) 870-3100 (other calls)