

WARRANTY

All parts and products are thoroughly inspected and tested from the time raw material is received at our plant, until the product is completed. We guarantee that all products are free from defects in materials and workmanship for a period of one year from the date of shipment. Any product that may prove defective within said one year period will, at our option, be promptly repaired, or replaced, or credit given for future orders. This warranty shall not apply to any product which has been altered in any way, which has been repaired by any party other than an authorized service representative, or when such a failure is due to misuse or conditions of use. We shall have no liability for labor costs, freight costs, or any other cost or charges in excess of the amount of invoice for the products.

THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND SPECIFICALLY THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

WARNING:

CIVACON products should be used in compliance with applicable federal, state, and local laws and regulations. Product selection should be based on physical specifications and limitations, compatibility with the environment, and the material to be handled.
CIVACON MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE.



TECHNICAL ASSISTANCE

If at any time during the installation a question arises that is not covered in this Installation Instruction, or with any other applicable documents referenced, feel free to call the **CIVACON ELECTRONICS TECHNICAL ASSISTANCE LINE** :

**In the U.S.A., Call 1-800-5 CIVACON
(800-524-8226)**

For the **CUSTOMER SERVICE DEPARTMENT** :
In the U.S.A., Call 1-888-526-5657 ;
Outside the U.S., call your local agent.

DIGITAL PRESSURE GAUGE DRY BULK PRESSURE MEASUREMENT

INSTRUCTION GUIDE



4304 MATTOX RD. * KANSAS CITY, MO 64150
PH: (816) 741-6600 * FAX: (816) 741-1061
(888) 526-5657 (888) 634-1433

INSTALLATION INSTRUCTIONS



PHONE: (816) 741-6600 • (888) 526-5657
Tech. Hotline: (800) 5-CIVACON • (800) 524-8226
4304 Mattox Road • Kansas City, MO 64150
www.civacon.com

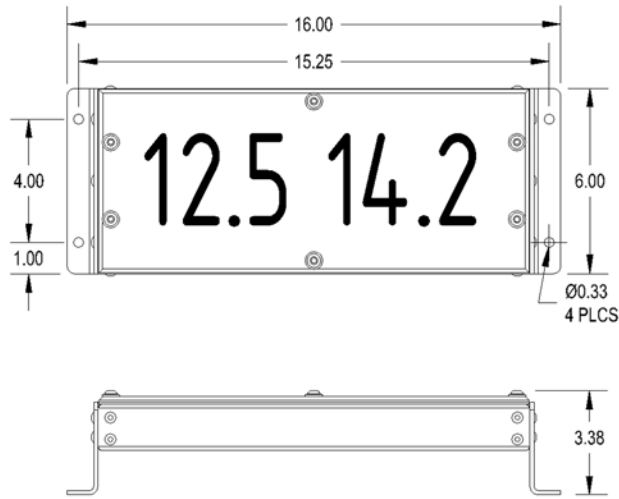


Figure 1. Chassis Mounting Measurements

1. Mount the chassis accordingly per Figure 1.
2. Insert tank/line airlines into inlet ports as marked in Figure 2.
3. Install enclosed tank/line labels to the corresponding pressure displays.
4. Apply 7 - 20 volts DC to the unit. It is recommended that you tap into any constant DC supply so the unit will have power at any time.
5. To test display, pressurize tank and line. **(NOTE: Maximum psi to the unit is 30 psi.)**
6. Note: the display will only turn on with a 4.0 psi. minimum to either side of the unit.

OPTIONAL FEATURE

1. Use the display reversing switch (see Figure 3) to orient the display as desired.

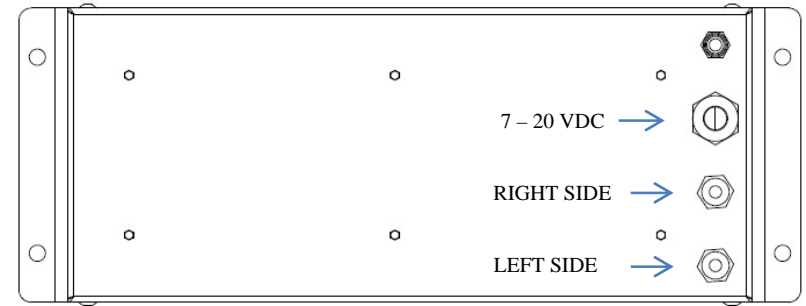


Figure 2. Back Side of Display Unit

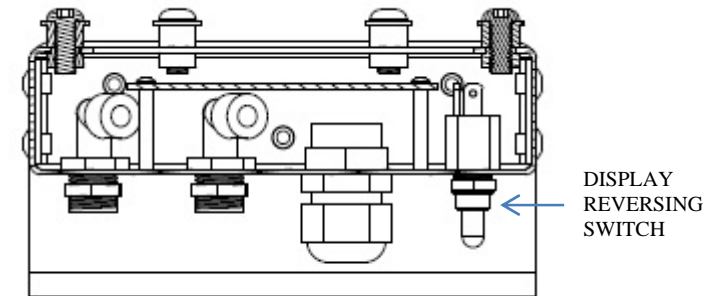


Figure 3. Side View

ORDERING INSTRUCTIONS

Repair Kit 12634-RK REPLACEMENT COVER

Includes:

1	12632	POLYCARBONATE COVER
6	11366M	SCREW
6	12639	SHOULDER WASHER