



Materials

Body and Adaptor Shaft: Stainless steel

Internal Components: Stainless steel

Seals: Specially formulated polymers and elastomers specific to high-pressure NGV applications.



Features

- ◆ **High-Flow** - the flow path has been optimized to increase the amount of flow and decrease the pressure drop resulting in a reduction of noise and vibration from the check valve.
- ◆ **Durable, Corrosion-Resistant Construction** - stainless steel construction provides improved durability and corrosion resistance in the harsh on-highway, heavy-duty environment.
- ◆ **Non-Contact Check Valve** - each OPW CL series receptacle contains a highly reliable non-contact check valve that opens when differential pressure is present during refueling.
- ◆ **Sealing System** - the sealing system in all CL series receptacles consists of a stainless steel poppet that aligns with a rearward facing captured seal located in the receptacle body. This

arrangement prevents seal "wash out" during high-flow and has exceptional wear resistance under all operating pressure and temperature conditions.

- ◆ **Rubber Dust Cap** - a standard protective dust cap is supplied with CL50 series receptacles.
- ◆ **Serviceable O-ring** - designed to prevent leakage at the connection point.
- ◆ Connects to CT5000S and CC6000 series heavy-duty CNG nozzles

Specifications:

Min. Flow Rate: 5000 SCFM @ 3000 psid

Temperature Range: -40° F to 85° F
(-40° C to 85° C)

Cv: 3.30

MAWP: 5000 psi (345 bar)





Ordering Specifications

Product #	Type/Size	Service Pressure*		Weight	
CL50	NGV1 P30HD; ISO14469 C200 7/8" - 14 SAE-10 Female Port	3600 psi.	(250 bar)	0.91 lb.	0.413 kg
CL5000	CL50 + 5/8" Double Ferrule Fitting	3600 psi.	(250 bar)	1.29 lbs.	0.585 kg
CL5078	CL50 + 001129	3600 psi.	(250 bar)	1.141 lbs.	0.518 kg
CL5016	CL50 + 001133	3600 psi.	(250 bar)	1.29 lbs.	0.585 kg
CL50B50	CL50 + 1/2" Double Ferrule Fitting	3600 psi.	(250 bar)	1.29 lbs.	0.585 kg
001129	7/8"-14 SAE-10 Male Fitting				
001133	16 mm Double Ferrule Fitting				
212433	7/8" - 14 SAE-10 to 1/2" Tube Fitting				
212439	1/2" Tube Nut and Ferrule Fitting				
001121	Replacement "Interface" O-ring for CL50 Series Receptacles				
001126	Replacement Rubber Dust Cap				

*CL series is certified for pressures NGV1 P36 & ISO14469 C250

CL50 Series Bus/Heavy-Duty Truck Receptacles

OPW CL50 Series receptacles are designed for use on extremely high-flow, heavy-duty applications including quick-fill, self-service fueling of transit buses and large trucks.

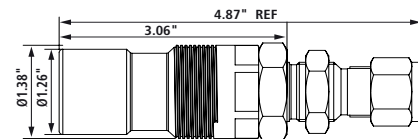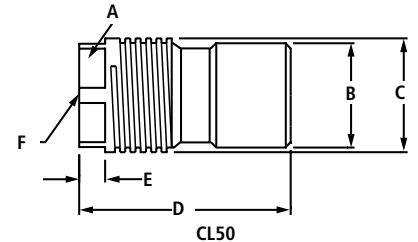

Custom w/tube fitting available. Call Us!

Dimensions

	in	mm
CL50		
A	1.25	32
B	1.25	32
C	1.39	35
D	2.67*	68*
E	0.31	8
F	SAE J1926-10 7/8"-14 UNF	

*D-Dimensions for:


	in	mm
CL5000	4.80	122.1
CL5016	4.96	126.1
CL5078	3.76	95.6

**Listings and
Certifications**



**NGV1
ISO14469**

CE 0036



Canadian Registration Numbers by Province

Canadian Registration Numbers OPW CleanEnergy Products	British Columbia	Alberta	Ontario	Quebec	Saskatchewan	Manitoba	Nova Scotia	New Brunswick
NT2A series	OC21049.21	OC21049.2	OC21049.25	OC21049.26	OC21049.23	OC21049	OC21049.29	OC21049.29
CT1000 series	OH18834.21	OH18834.2	OH18834.25	OH18834.26	OH18834.23	OH18834.24	OH18834.28ADD1	OH18834.27ADD1
CT5000	OH15417.51	OH18834.2	OH15417.5	OH15417.56	OH15417.56	OH15417.54	OH15417.58ADD1	OH18834.27
CC600 series	OH18834.21	OH18834.2	OH18834.25	OH18834.26	OH18834.23	OH18834.24	OH18834.28ADD1	OH18834.27ADD1
ILB-1	OH18834.21	OH18834.2	OH18834.25	OH18834.26	OH18834.23	OH18834.24	OH18834.28ADD1	OH18834.27ADD1
ILB-5	OH15417.51	OH15417.52	OH15417.5	OH15417.56	OH15417.56	OH15417.56	Pending	Pending
VLB	OH13989.51	OH13989.52	OH13989.5	OH13989.56	OH13989.56	OH13989.56	Pending	Pending
FLB-1000	OH17341.51	OH17341.52	OH17341.5	OH17341.56	OH17341.56	OH17341.56	OH17341.5987	OH17341.5987
FLB-5000	OH17341.51	OH17341.52	OH17341.5	OH17341.56	OH17341.56	OH17341.56	OH17341.5987	OH17341.5987
NGVLB	OH17341.51	OH17341.52	OH17341.5	OH17341.56	OH17341.56	OH17341.56	OH17341.5987	OH17341.5987
BDN	Pending	OH17140.21	OH17140.25	OH17190.26	Pending	OH17140.24	Pending	Pending

TUV Approved

- ◆ NT2A series nozzles
- ◆ CT1000 series nozzles
- ◆ CT5000 series nozzles
- ◆ CC 6000 series nozzles
- ◆ ILB series breakaways
- ◆ FLB series breakaways
- ◆ NGVLB series breakaways
- ◆ LB, LD, LE series receptacles
- ◆ CL series receptacles