
# The Industry's Most Trusted DEF Nozzle



The global standard for more than a century, OPW nozzles are built to perform better and last longer\* than any other brand to deliver unprecedented peace-of-mind, ROI, and performance. The NEW OPW 19DEF Series Automatic Nozzle is specifically designed for your commercial and industrial fleet operations, offering unmatched reliability with the features you want:

- New stainless steel spout provides optimum DEF purity and prevents corrosion
- Lowest Overall Cost of Ownership reliable, long lasting design based on proven OPW quality platform and industry standard-setting technology
- Ease of Use sleek, lightweight design with patented Accu-Stop® Flow Control Technology and convenient one-finger hold-open clip to set flow rate
  - NOTE: The OPW 19DEF Series Nozzles are for commercial fleet applications only and are not UL Listed for gasoline dispensing facilities.

- Guaranteed DEF Compatible all materials of construction are 100% tested for DEF compatibility
- <u>User Comfort</u> attractive 2-Piece Newgard™ Hand Insulator is the most comfortable nozzle in the industry in hot or cold weather
- Vehicle Protection our Duratuff® lever guard not only provides for rugged durability when dropped but it won't scratch your fleet vehicle
  - \* OPW internal lab cycle testing results with DEF as of August 2013.

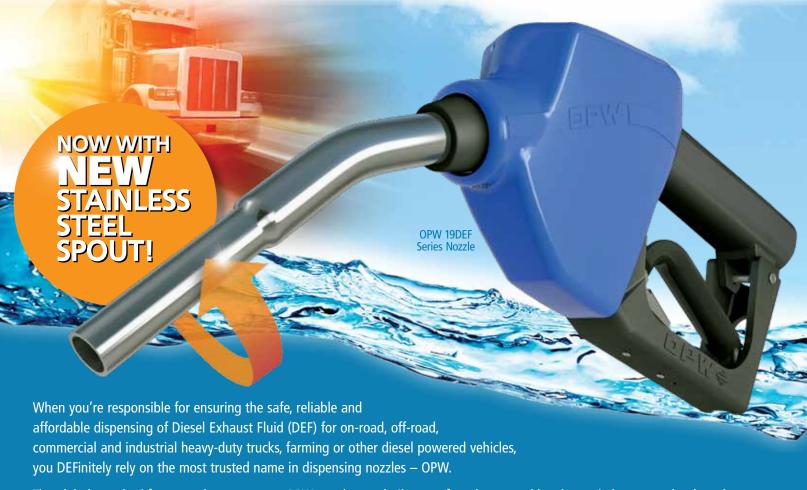

## **OPW 19DEF Series Industrial Automatic Nozzle**

When you're responsible for ensuring the safe, reliable and affordable dispensing of Diesel Exhaust Fluid (DEF) for on-road, off-road, commercial and industrial heavyduty trucks, farming or other diesel powered vehicles, you rely on the most trusted name in dispensing nozzles – OPW.

As the global standard for more than a century, OPW nozzles are built to perform better and last longer\* than any other brand to deliver unprecedented peace-of-mind, ROI, and performance. The NEW OPW 19DEF Series Industrial Automatic Nozzle is specifically designed for your commercial and industrial fleet operations, offering unmatched reliability with the features you want.

\* OPW internal lab cycle testing results with DEF as of August 2013.

#### **Materials**

Packing & Disc: Fluorocarbon
Lever & Lever Guard: Duratuff®
Spout: O.D. 19mm (0.75 in) per
ISO 22241 Specifications
Inlet Size: 3/4" NPT or 3/4" BSPP
Weight: 2.73 lbs. each, 43.1 lbs./case
of 15, 1.25 kg each,

19.9 kg/case of 15



#### **Features - Benefits**

- New Stainless Steel Spout provides optimum DEF purity and prevents corrosion
- Lowest Overall Cost of Ownership – reliable, long lasting design based on proven OPW quality platform and industry standard-setting technology
- DEF Compatible all materials of construction are 100% 3rd party tested and approved for DEF compatibility
- Ease of Use sleek, lightweight design with patented Accu-Stop® Flow Control Technology and convenient one-finger hold-open clip to set flow rate
- User Comfort attractive 2-Piece
   NEWGARD™ Hand Insulator is the

- most comfortable nozzle in the industry in hot or cold weather
- Vehicle Protection our Duratuff® lever guard not only provides for rugged durability when dropped but also won't scratch your fleet vehicle
- Meets ISO 22241 Requirements

#### **Design Working Pressure**

 50 PSI (3.45 bar) maximum pressure

NOTE: The OPW 19DEF Series Nozzles are for commercial fleet applications only and are not UL Listed for gasoline dispensing facilities.

### **Ordering Specifications**

Product #	Description
19DEF-0500SS	Nozzle - 19mm spout; ¾" Female NPT inlet connection, blue hand warmer
19DEF-050LSS	Nozzle - 19mm spout; ¾" Female BSPP inlet connection, blue hand warmer
Hose Adaptors	(Sold Separately).
19DM-0100	$3\!4\text{"}$ MNPT to 1" MNPT - Connecting nozzle to 1" NPT Female hose
19DF-0100	3/4" MNPT to 1"FNPT - Connecting nozzle to 1" NPT Male hose
19DML-0100	3/4" MBSPP to 1" MBSPP - Connecting nozzle to 1" BSPP Female hose
19DML-0075	¾" MBSPP to ¾" MBSPP - Connecting nozzle to ¾" BSPP Female hose

