


## Dual Layer Access Pipe

A 4" diameter corrugated flexible conduit is used to provide access to and permit the future replacement of the Flex piping if desired. This corrugated pipe is strong enough to withstand H-20 loading requirements when properly buried and thick enough to minimize damage from shipping and jobsite handling. Access pipe can accommodate the 3/4", 1", 1-1/2", 2" and 3" FlexWorks supply pipe.

### Features & Benefits:

- ◆ Crush and puncture-resistant
- ◆ Semi-smooth liner facilitates ease of installation
- ◆ Saves you time and money
- ◆ No buried joints

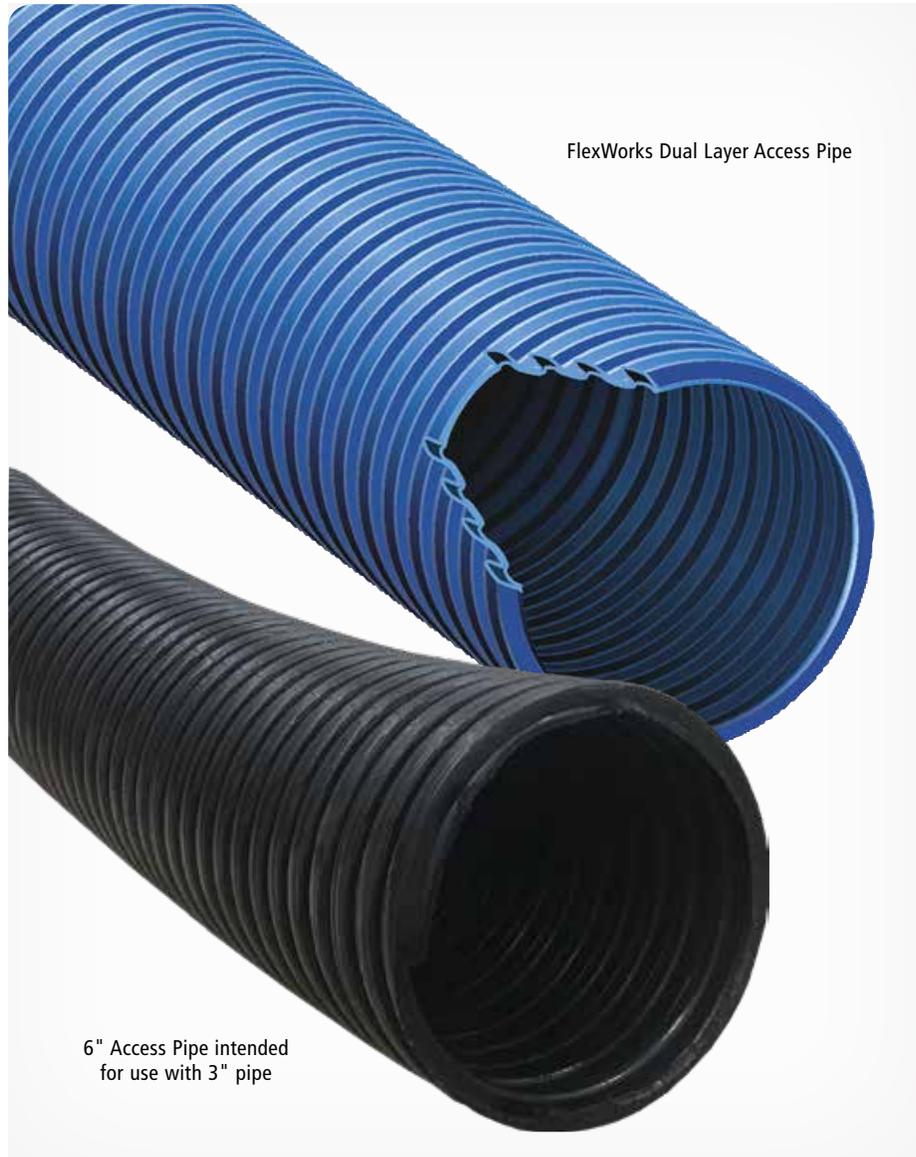

## Ordering Specifications - FlexWorks Dual Layer Access Pipe

Part #	Application	Minimum Bend Radius		Packaging		Dimensions				Box Size	Weight	
		in.	mm			I.D.		O.D.			in.	lbs.
AXP40-100	4" Dual Layer Access Pipe	18"	457	Box	100 ft.	4	102	4.760	121.0	42x42x32	115	52
AXP40-250	4" Dual Layer Access Pipe	18"	457	Box	250 ft.	4	102	4.760	121.0	60x60x32	218	99
<b>NEW</b> AXP60-250	6" Dual Layer Access Pipe	36"	914	Box	250 ft.	6	152	7.100	180.0	60x60x32	243	113
<b>NEW</b> AXP60-500	6" Dual Layer Access Pipe	36"	914	Box	500 ft.	6	152	7.100	180.0	96x60x32	485	220

Access Pipe Installation Instructions Sheet Order Number: **API-0001**