

# Watertight Wonder.

**NEW**

**FibreTITE** TANK  
SUMP



Redesigned inverted U-Channel in base to hold resin for Top Hat (Bonds with RK-5000 Resin Kit)



Ergonomic "L-Handle" Provides Ease of Use and a visual indicator that the handle is in the locked position and the watertight lid is secure.



Industry's most consistent wall thickness and only sump with smooth sealing surfaces inside and out for optimum entry fitting watertight integrity.

From the engineering labs of FLEXWORKS and FIBRELITE, OPW has made the best even better. Meet the newest member of the FibreTite Family of sumps, the most watertight sumps on the market today. The new **FibreTite Tank Sump**:

- The only sump manufactured using superior Resin Transfer Molding (RTM) technology. The RTM process utilizes a 2-sided mold to ensure consistent wall thickness and exceptionally smooth wall surfaces inside and out for an ultra-tight entry fitting sealing surface.
- Inverted U-Channel allows for equal resin distribution, creating a superior bond between the base and the top hat to eliminate water intrusion.
- Trimmable top hat design allows for tailored height adjustments
- Stainless steel ring and watertight sealing gasket provide the proven seal-ability of our world renowned Fibrelite sumps
- Available with and without bottom for collar or flange mounting

This is just another example of how OPW is leading the way in containment solutions, and **Defining What's Next.**

To request more information, please contact your OPW District Manager, call OPW Customer Service at 800-422-2525 or visit us at [www.opwglobal.com](http://www.opwglobal.com).

**OPW**   
RETAIL FUELING  
a **DOVER** company

**DEFINING** | WHAT'S NEXT


OPW FibreTite tank sumps function as a liquid-tight isolation container providing secondary containment for tank fittings valves, pumps and FlexWorks® or Fiberglass pipe fittings. FibreTite provides surface access to the tank itself, as well as a clean and dry environment for future service and maintenance. The height-adjustable top-hat accommodates different tank bury depths.

### Ordering Specifications

New Name	Sump Base Diameter	Max Sump Height	Minimum Sump Height	Sump Mount Design	Sump Lid Diameter	Minimum Diameter Opening	Additional RK-5000 Resin Kits Needed for Top Hat Attachment (Sold Separately)	Additional RK-5000 Resin Kits Needed for Collar Ring Attachment (Sold Separately)
42" FTSM-4233CR	42"	46"	33.5"	Collar Ring Mount	33"	29"	1	1
FTSM-4233SB	42"	46"	33.5"	Solid Bottom	33"	29"	1	-
FTSD-4233CR	42"	53"	40.5"	Collar Ring Mount	33"	29"	1	1
FTSD-4233SB	42"	53"	40.5"	Solid Bottom	33"	29"	1	-
FTSM-4237CR	42"	46"	33.5"	Collar Ring Mount	37"	34.6"	1	1
FTSM-4237SB	42"	46"	33.5"	Solid Bottom	37"	34.6"	1	-
FTSD-4237CR	42"	53"	40.5"	Collar Ring Mount	37"	34.6"	1	1
FTSD-4237SB	42"	53"	40.5"	Solid Bottom	37"	34.6"	1	-
48" FTSM-4837CR	48"	46"	33.5"	Collar Ring Mount	37"	34.6"	1.5	1
FTSD-4837CR	48"	53"	40.5"	Collar Ring Mount	37"	34.6"	1.5	1

### Replacement Parts/Accessories

Part Number	Description
FTSMBASE-42CR	42" Medium Bury Collar Mount Base
FTSMBASE-42SB	42" Medium Bury Solid Bottom Base
FTSDBASE-42CR	42" Deep Bury Solid Bottom Base
FTSDBASE-42SB	42" Deep Bury Solid Bottom Base
FTSMBASE-48CR	48" Medium Bury Collar Mount Base
FTSDBASE-48CR	48" Deep Bury Collar Mount Base
FTS-4233TH	Top Hat for 42" Base Sump and 33" Lid
FTS-4237TH	Top Hat for 42" Base Sump and 37" Lid
FTS-4837TH	Top Hat for 48" Base Sump and 37" Lid
WT-33SL	33" Fibretite Sump Lid
WT-37SL	37" Fibretite Sump Lid
FCS42-EX12	42" Diameter Sump 12" Extension (1 RK-5000 kit needed for attachment sold separately)
FCS48-EX12	48" Diameter Sump 12" Extension (1.5 RK-5000 kit needed for attachment sold separately)
RK-5000	1 Quart Epoxy Resin Kit
S-CR-FGK	Optional Glassing Kit for Collar Ring Attachment

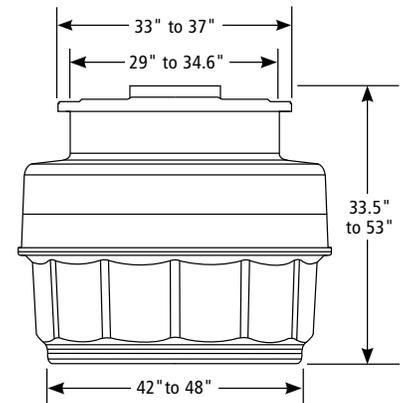

To request more information, please contact your OPW District Manager, call OPW Customer Service at 800-422-2525.