

# CIVACON



PART OF OPW A **DOVER** COMPANY

## ***Petroleum*** ***Electronic & Mechanical Products***



# **System**3

**Single Source System Package**

**Three Year System Package, Component Warranty Program**



# CIVACON



PART OF OPW A DOVER COMPANY

## System3

System 3 components are designed, engineered, built and backed by one manufacturer to work in unison with one another. No other system offers this peace-of-mind assurance. Best of all, it comes with a **3-year total system warranty** covering manufacturer defects. Specify the world's most trusted, fully integrated bottom-loading system....

System 3 by Civacon

Vapor Recovery Adaptors




Petroleum Manhole Covers



Sequential Vapor Valves



Overfill Detection

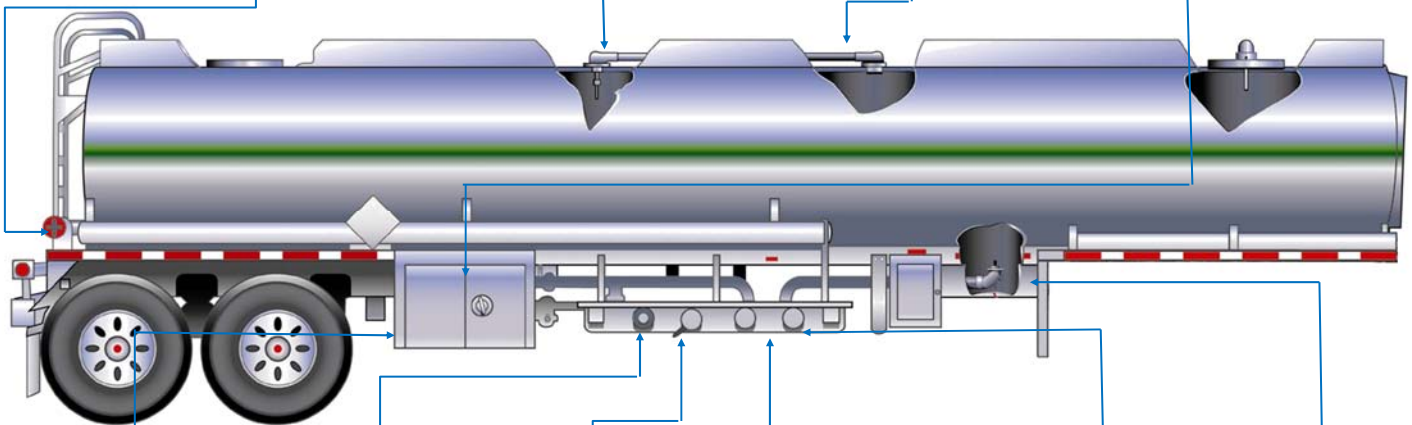

Air Controls



Unloading Couplers



API's



Air Interlock Valves



Dust Caps



Internal Valves



# Component Selection Guide

Check required items from each product category. Specify particulars when required.

Fax or E-mail a copy of this form to Civacon or your Account Manager.

We will contact your builder and organize the rest!

## A - Petroleum Manholes

- 16" Offset Fill Cover (SSVN Series)
- 16" Centered Fill Cover (SSTN Series)
- 20" Offset Fill Cover (SSWN Series)
- 20" Centered Fill Cover (SSUN Series)

## B - Vapor Recovery Vents

- 3-Inch Threaded Hood (Part No.: T196SV)  
(for 16-inch SSVN Series Manholes)
- 4-Inch Threaded Hood (Part No.: T195SV)  
(for 20-inch SSWN Series Manholes)  
*Fits over bolted vent mounting pattern too!*

## C - Internal (Emergency) Valves

- 5 x 4 MaxAir II™ Series Emergency Valves  
(standard w/Tef-Sil o-rings Viton options available contact factory)

Flanged

Victaulic

- 90°(Part# VA6182)
- 90°(Part# VA5182)
- Straight (Part# VA8182)
- Straight (Part# VA7182)

- 3-Inch Sequential Series Emergency Valves

Flanged

Victaulic

- 90°(Part# VA2050)
- 90°(Part# VA1050)
- Tee(Part# VA3050)

## D - Vapor Recovery Adaptors, Dust Cap & Air Interlocks

- 4-Inch Threaded with Poppet & no Sight Glass (Part # 611T)
- 4-Inch Threaded no Poppet & no Sight Glass (Part # 610T)
- 4-Inch Flanged Style with Poppet & with Sight Glass (Part # 611FB)
- 4-Inch Flanged no Poppet & no Sight Glass (Part # 610F)
- 4-Inch High Flow Flanged Style with Poppet & with Sight Glass (Part # 633LVB)
- Orange Plastic Vapor Dust Cap (Part # 1711T)
- Air Interlock **with** standard 1" round button (Part # 300)
- Air Interlock **with** "duck-bill" foot (Part # 301)  
*(for 633LVB Vapor Adaptor)*

## E - CivaControl

- SCP-\_\_\_ Air Control Panel  
(available in 1 through 8 compartment configurations)

## G-API Bottom Loading Adaptors, Dust Cap & Gravity Drop Adaptors

- Openable, **with** bubble Sight Glass (Part # 891BA)
- Openable, **no** bubble Sight Glass (Part # 891A)
- Non-Openable, **with** bubble Sight Glass (Part # 891NB)
- Non-Openable, **no** bubble Sight Glass (Part # 891N)
- Pressure Tight Dust Cap w/ Single Cam  
(Part #: 875C)
- Single Lever Cam & Groove Male Outlet Style
  - 4" (Part # 876C-AL40)
  - 3" (Part # 876C-AL4030)
- Dual Lever Cam & Groove Male Outlet Style
  - 4" (Part # 871A-AL40)
  - 3" (Part # 871A-AL4030)

## H - Overfill Detection System

- ROM II – 2-Wire Onboard Monitor System
  - with** ROM-Link™ Style Plug-N-Load™ Wiring
  - with** Retain Product (Bottom) Sensors
- Opti-Link Overfill Detection System (with **no** OBM)
- Dual Socket, Pre-wired (with both API 4 J-Slot & 3 J-Slot Faceplates)
- API Thermistor Standard Socket (with 4 J-Slots & Green Cap)
- API 5-Wire Optic Standard Socket (with 3 J-Slots & Blue Cap)

NOTE: All of our Sockets now include built-in Ground

Fleet / Contact: \_\_\_\_\_

No. of Compartments: \_\_\_\_\_ No. of Tanks: \_\_\_\_\_

Tank Mfg.: \_\_\_\_\_

Date: \_\_\_\_\_

Company: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_

Phone #: \_\_\_\_\_ Fax: \_\_\_\_\_

E-mail: \_\_\_\_\_

Signature: \_\_\_\_\_

## ***With System 3 you can have it all...***

- Full integrated systems designed to minimize downtime and maximize your return on investment.
- Only Civacon's System 3 single-source offering of tank components allows you to take advantage of our complete tank system solution.
- The CivaControl Air System and ROM II Overfill Detection System feature integrated interlocks to protect your tank during unloading.
- Products temperature tested -40° F to 140° F
- Compatible with diesel, biodiesel, gasoline, ethanol and methanol.
- Faster unloading with high flow flat bottom API & high flow vapor valves.
- Products feature standard Tef-O-Sil™ or Viton® GF seals for chemical compatibility.
- Don't risk the quality, integrity and support of your bottom loading system by piecing together a collection of components from separate manufacturers. In the end, it adds up to hassles, headaches, delays and a system that may not work together.
- System 3 Components are designed, engineered, built and backed by one manufacturer to work in unison with one another. Civacon

**24 hour Technical Service (800) 524-8226**

**Toll-Free Sales Support**

**Monday - Friday 8am - 5pm**

**(Central Standard Time)**

**(888) 526-5657**

