

Materials

- Body:** Aluminum
- Adaptor:** Zinc Aluminum
- Seals:** Buna-N O-Ring, Viton® O-Ring
- Bearings:** Nylon  UL Listed MH4542




36S-5080

Ordering Specifications

Product Number	Inlet Thread x Outlet Thread	lbs.	kg
36S-5080	3/4" M x 3/4" F (NPT) (19 mm x 19 mm)	0.30	0.14
36S-5090	1" M x 1" F (NPT) (25 mm x 25 mm)	0.40	0.18

OPW 36S Hose Swivel

Designed for use with fuel oil nozzles (at inlet only), the OPW 36S provides 360° swivel action. The full-circle swivel reduces the physical strain of aligning the nozzle with the fillpipe.

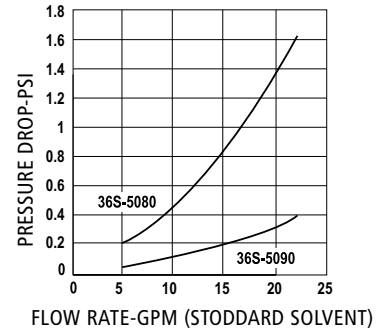

Materials

- Body:** Electroless nickel-plated
- Bearings:** Molded plastic
- Seals:** Buna-N O-Ring, felt dust seal, Viton® O-Ring



25-0110


Ordering Specifications

Product #	Inlet Thread		Weight	
	in.	mm	lbs.	kg
25-0110	1 1/4" (NPT)	32	0.95	.43
25-0120	1 1/2" (NPT)	38	1.06	.48
25C-0130*	1 1/4" (NPT)	32	0.95	.43

*With Check Valve

OPW 25 Hose Swivel

Designed for use with fuel oil nozzles (at inlet only), the OPW 25 provides 360° swivel action. The full-circle swivel reduces the physical strain of aligning the nozzle with the fillpipe.

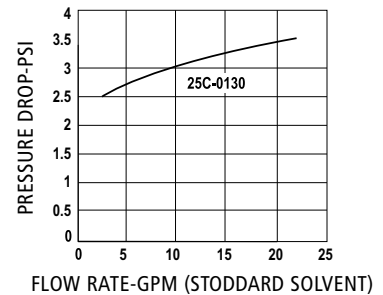

OPW 2" Single-Plane Hose Swivel

Durable brass construction with high flow rate.

Materials

- Body:** Brass
- Seals:** Buna-N O-Rings



Product #	in.	mm	lbs.	kg
2-0055	2	50.8	1	.45

