

Materials

- Body: Aluminum
- Adaptor: Zinc Aluminum
- Seals: Buna-N O-Ring, Viton® O-Ring
- Bearings: Nylon  UL Listed MH4542




36S-5080

Ordering Specifications

| Product Number | Inlet Thread x Outlet Thread | lbs. | kg |
|----------------|---------------------------------------|------|------|
| 36S-5080 | 3/4" M x 3/4" F (NPT) (19 mm x 19 mm) | 0.30 | 0.14 |
| 36S-5090 | 1" M x 1" F (NPT) (25 mm x 25 mm) | 0.40 | 0.18 |

OPW 36S Hose Swivel

Designed for use with fuel oil nozzles (at inlet only), the OPW 36S provides 360° swivel action. The full-circle swivel reduces the physical strain of aligning the nozzle with the fillpipe.

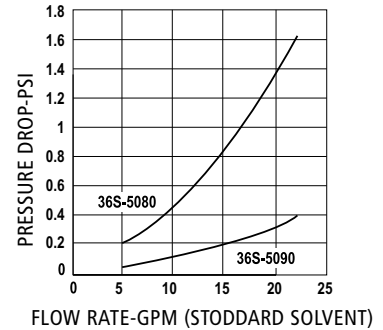

Materials

- Body: Electroless nickel-plated
- Bearings: Molded plastic
- Seals: Buna-N O-Ring, felt dust seal, Viton® O-Ring



25-0110


Ordering Specifications

| Product # | Inlet Thread | | Weight | |
|-----------|--------------|----|--------|-----|
| | in. | mm | lbs. | kg |
| 25-0110 | 1 1/4" (NPT) | 32 | 0.95 | .43 |
| 25-0120 | 1 1/2" (NPT) | 38 | 1.06 | .48 |
| 25C-0130* | 1 1/4" (NPT) | 32 | 0.95 | .43 |

*With Check Valve

OPW 25 Hose Swivel

Designed for use with fuel oil nozzles (at inlet only), the OPW 25 provides 360° swivel action. The full-circle swivel reduces the physical strain of aligning the nozzle with the fillpipe.

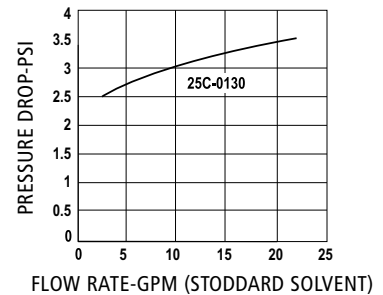

OPW 2" Single-Plane Hose Swivel

Durable brass construction with high flow rate.

Materials

- Body: Brass
- Seals: Buna-N O-Rings



| Product # | in. | mm | lbs. | kg |
|-----------|-----|------|------|-----|
| 2-0055 | 2 | 50.8 | 1 | .45 |

