


Sockets

CIVAcon's Sockets are designed for optimal communication between tank-truck and EN13922 rack systems.

4403E-X001 Socket

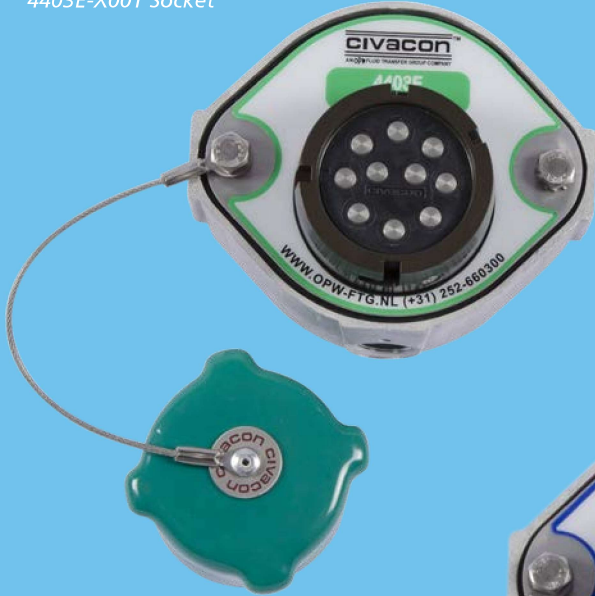

4103E-X001 Socket




Features and Benefits

- In accordance with API standards
- 4403B-model in accordance with EN13922
- Pressure switch standard on 4103PS and 4403B in accordance to VOC requirements
- Simple and durable connection using 3 J-slots (4103-model) or 4 J-slots (4403-model)
- Color coded labels and caps for easy identification
- Grounding pin incorporated in all models
- Connecting up to
 - 8 2-wire optic sensors
 - 12 5-wire optic sensors

Specifications

4103-X001/4403-X001

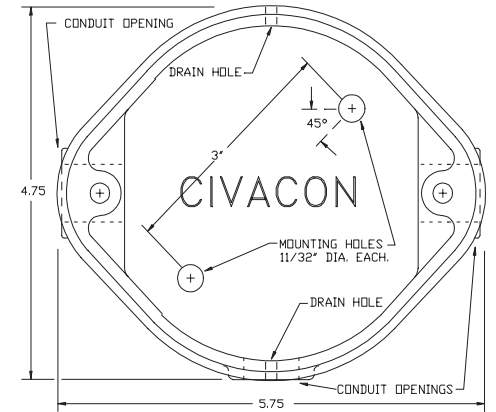

4403B-X001 Socket



General specifications

- Weight

4103E-EURO	1,1 Kg
4103PS	1,3 Kg
4403B & 4403E	1,2 Kg

Spare parts

4150-4150 REPAIRKIT FOR 4103E:

1	H50025M	DUST CAP, BLUE
2	H50288M	CABLE

4450-4450 REPAIRKIT FOR 4403E:


1	H50065M	DUST CAP, GREEN
2	H50288M	CABLE

4450B REPAIRKIT FOR 4403B:

1	H52535M	DUST CAP, BLACK
2	H50288M	CABLE

ITEM	PART NR	DESCRIPTION	QTY
1	H52538M	SCREW, M8 X 1.25 X 20MM	2
2	H50288M	Cable	1
3	C40151A-3	"J" SLOT SOCKET - 3	1
4	H52479M	GASKET, NEOPRENE	1
5	H52538M	SCREW, M8 X 1.25 X 20MM	2
6	H50250M	WASHER, 5/16 SS	2
7	H53048M	SCREW, #8-32 3/8"	4
8	H50064M	GASKET, NEOPRENE	1
9	D52537A	BODY	1
10	H52962M	Plate	1
12	H50291M	Spacer	1
13	H53038M-4103E	Label	1
14	H50617M	Insert	4
15	H50616M	Contact, Button	6
16	H50074M	Screw, #6-32 1/2"	1
17	H50618M	Ground Wire	1
18	H50623M-2	Screw, #6-32 3/8	1

Spare part only supplied as complete kit

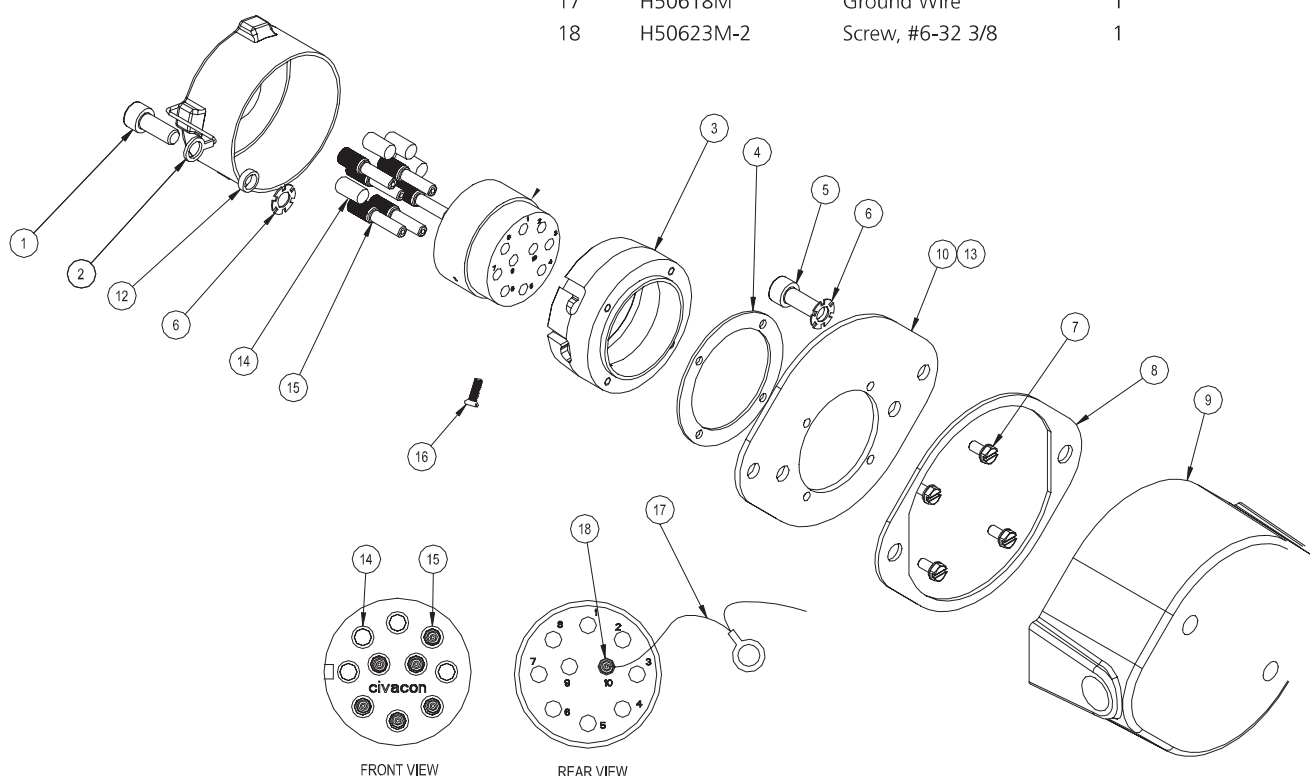

Related products

Art. number	Description
2110E-L30	30 m 5-Wire straight cable conform EN13922
EL05154	Cable gland HSK-K-EX: m20x 1,5; 6-12 mm blue
EL00001	Ground bolt
3205E-XR1M	ROM onboard monitoring system, right handed, with 2W rack interface, metric
3205E-XL1M	ROM onboard monitoring system, left handed, with 2W rack interface, metric
1398E-E003	Truck tester, 4-J-slotted, black plug
1397E-E003	Truck tester, 3-J-slotted, blue plug
K1-5110E-18	5-Wire optic overfill sensor
K1-5550U-18	2-Wire optic overfill sensor
5032U	Retain sensor

Ordering specifications

Art. number	Description
4103E-X001	3J Slot 6-Pin socket for optic sensors 5W, BASEEFA
4103PS-E001	4103E with pressure switch conform 94/63EC (VOC)
4403B-X001	10-Pin socket with pressure switch for optic and thermistor 4J Slot sensors, black label and cap, in accordance with EN13922 and VOC
4403E-X001	10-Pin socket for thermistor sensors 2W with green label and cap