THE ALL NEW E-SERIES!













State-of-the-Art Innovation that Will Blow Your Mind **but Not Your Budget**

OPW brings you a new dispenser sump that delivers cost-effective peace of mind for retail fueling operators. The innovative DSE combines superior design, premium materials and world-class manufacturing expertise without breaking the bank, and its fast, reliable construction means it's ready to slot into your station right away.

Any Pipe, Any Fittings

DSE Dispenser Sumps fit into your existing dispensing network with ease. The sump base is designed to create strong bonds with fiberglass and flexible pipe and fittings.

Nothing Else Stacks Up... or **Unstacks as Easily!**

While some dispenser sumps are bulky and hard to store, the DSE is designed to stack to make storage simple. The DSE's universal base is sized to nest perfectly inside itself, while the feet and specialized grooves help it to unstack with ease.





Ordering Specifications: DSE Dispenser Sumps

ווכ	ne	ns	10	n

Sump Model #	Α		В		С		D	
	in.	cm	in.	cm	in.	cm	in.	cm
DSE-1836	20.22	51.36	17.20	43.69	44.11	112.04	35.90	91.19
DSE-1543	17.18	43.64	14.60	37.084	45.90	116.59	38.90	98.81
DSE-1741	18.50	46.99	16.70	42.42	44.20	112.29	38.10	96.774

Separate Component Part Numbers

Part #	Decription
DSE-BASE	Description: DSE Universal Base. Combines with any DSE top
DSE-TOP-1836	Gilbarco Encore Top. Combine with DSE-BASE to make DSE-1836
DSE-TOP-1543	Wayne Ovation Top. Combine with DSE-BASE to make DSE-1543
DSE-TOP-1741	Wayne Helix Top. Combine with DSE-BASE to make DSE-1741



as the DSE, OPW is proud to introduce the TSE Tank Sump!

Innovation in Motion

The industry's first all composite containment system utilizing sheet molded compounds (SMC) to create a high-quality solution that quickly creates cost-effective peace of mind for retail petroleum operators.

Smooth Sides, Inside and Out

As the only manufacturer in the industry using Advanced Composite Technology, OPW's E-Series are the only fiberglass sumps with smooth walls on the inside and outside of the sump. Smooth sides bond better to prevent leaks and other maintenance needs.

Order Specifications: TSE Tank Sumps

Part Number	Sump Mount Design	Cover Style	Sump Base Diameter	Maximum Sump Height	Minimum Sump Height	Sump Lid Diameter	Minimum Diameter Opening
TSE-4233CR	Collar Ring	Compression	42"	42"	30"	34"	33"
TSE-4233SB	Solid Bottom	Compression	42"	43"	30"	34"	33"
TSE-4233CR-WT	Collar Ring	Locking L Handles	42"	45"	33.5"	34"	29"
TSE-4233SB-WT	Solid Bottom	Locking L Handles	42"	46"	33.5"	34"	29"

ONE OF A KIND



PREMIUM CONSTRUCTION

Advanced Composite Technology results in a robust product that operators can depend on to be high-quality every time.



READY WHEN YOU NEED THEM


Efficient manufacturing creates the industry's shortest lead times and easy installation.



CONSISTENT QUALITY EVERY TIME

Consistent wall thickness, material blend, shape and detail on every sump.

High Quality Composite Performance for the Future of Fueling

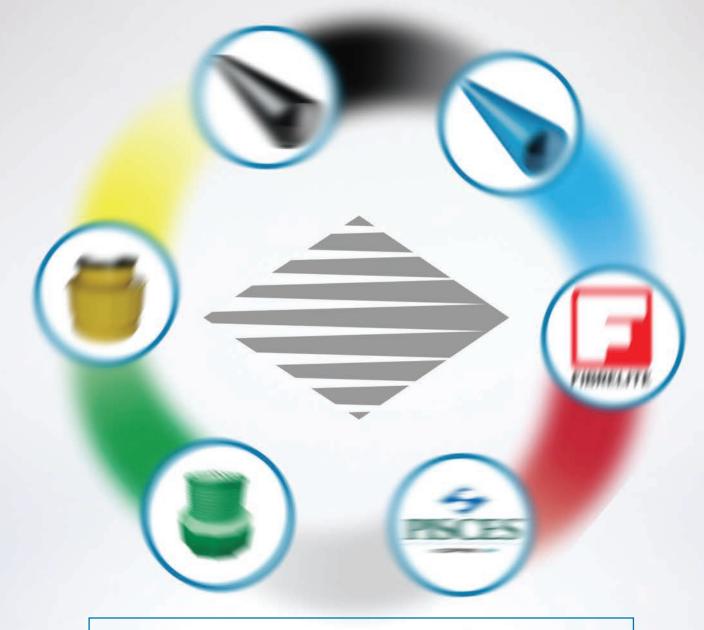

The perfect blend of time-tested wisdom, experience, innovation, and technology. No flashiness required, just **OPW Defining What's Next** by blending the best of our past and creating the "Gray" test containment system in the fueling industry.

