




FibreTite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.



Features



- CARB Approved
- Unaffected by biofuels
- Will not corrode, crack or crumble
- Sealed manhole covers are water and vapor tight
- Easy and safe manual removal
- Lifting aid eliminates back injury and crushed fingers
- Eliminates risk of theft due to no resale value to the scrap market
- Incredibly strong monolithic structure that will not delaminate
- Treads incorporate a specialised anti-slip material
- Range of UV stable colors available that will not flake or crack
- Security locks available
- Cover marking / customisation available
- Anti-static

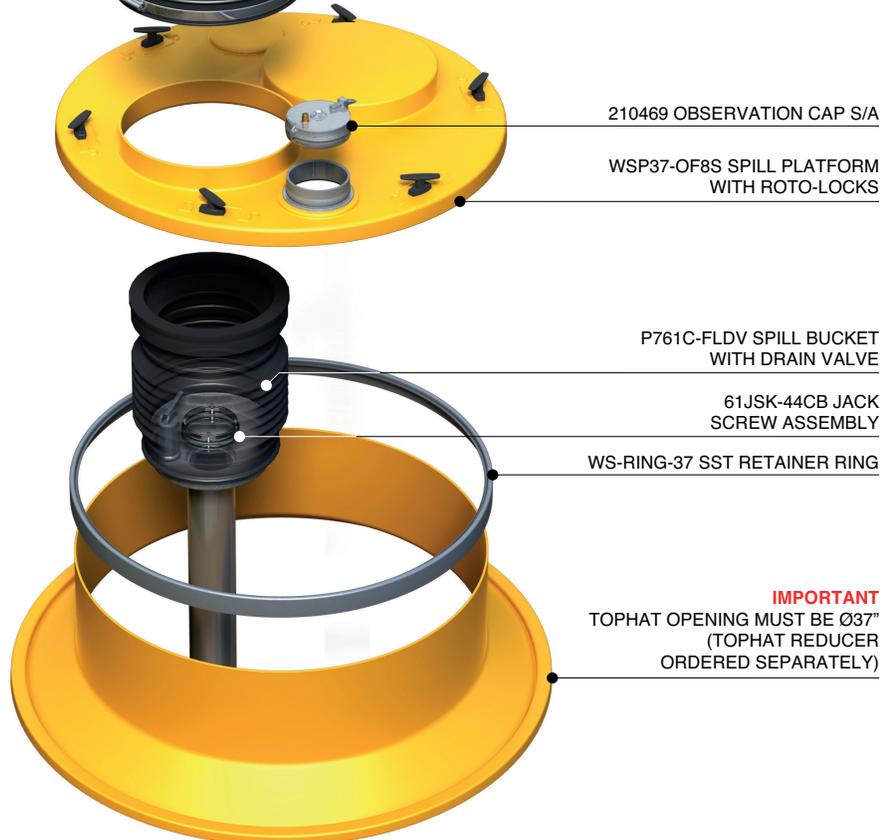

FibreLite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOWHER COMPANY

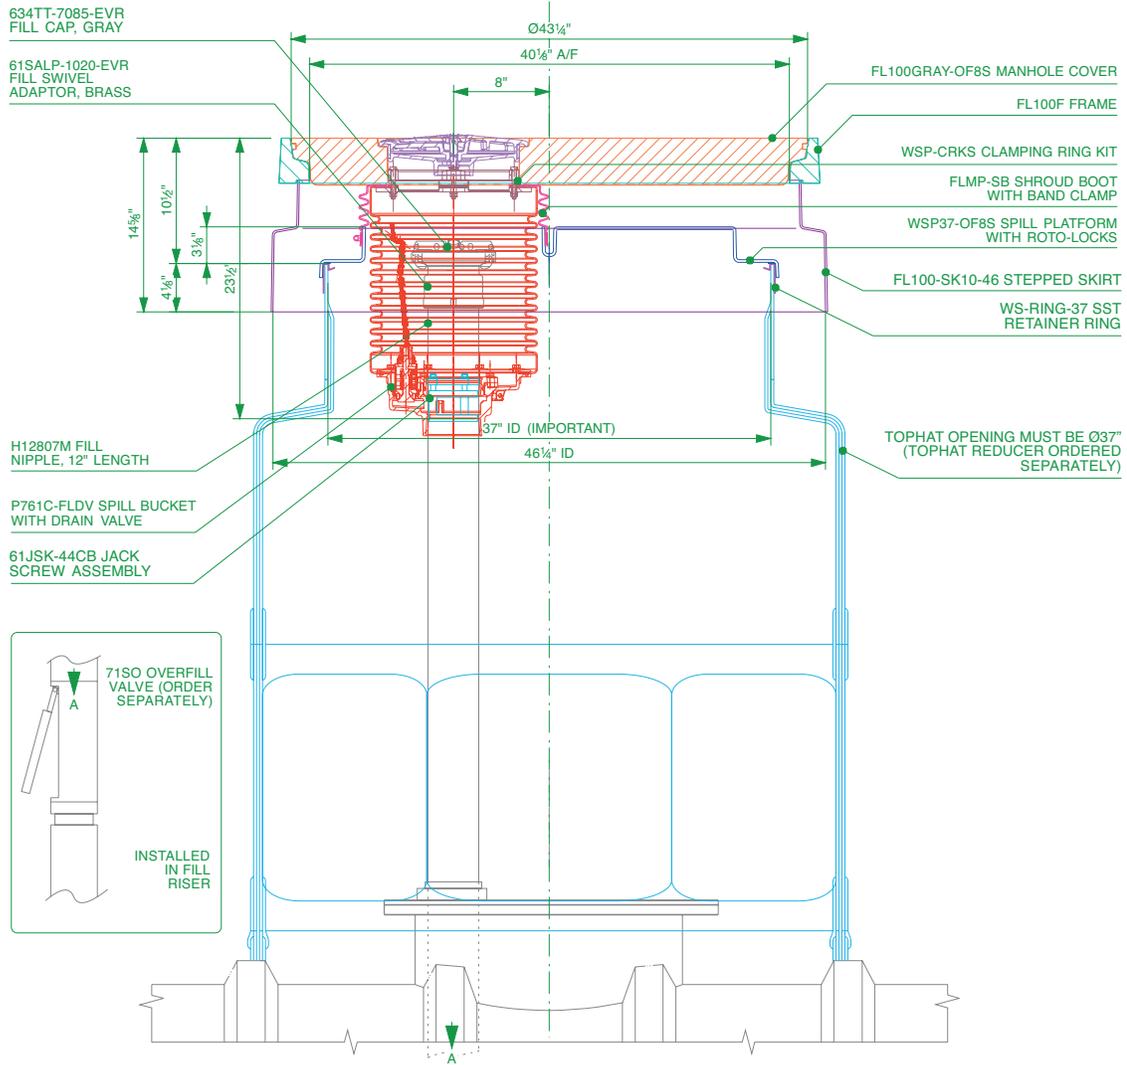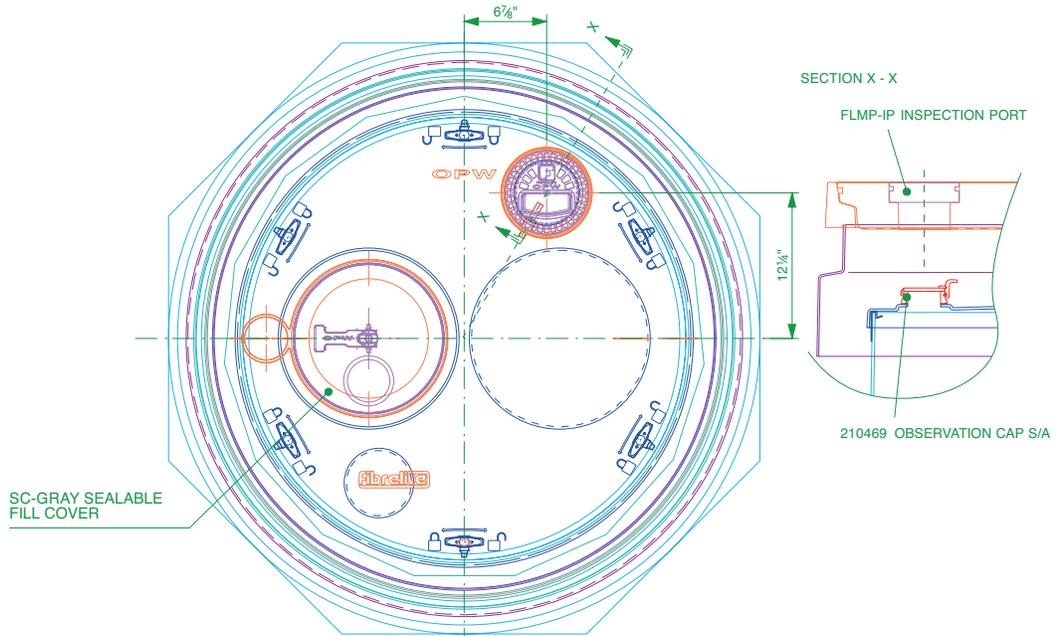

FibreTite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE 
PART OF OPW A DOVER COMPANY

TYPICAL INSTALLATION

! VERY IMPORTANT !


To allow for drainage, Fibrelite recommends that the concrete be sloped away from the top outer edge of the frame (A) a minimum of 1/2" over a 12" distance. Do not expose the top outer edge of the frame (A) – the concrete pad must be flush with the top outer edge of the frame.

CONCRETE

VERY IMPORTANT

FRAMES MUST BE INSTALLED FLUSH WITH FINISHED GRADE OR SET SLIGHTLY BELOW FINISHED GRADE TO PROTECT FROM SNOWPLOW DAMAGE

VERY IMPORTANT
The underside of the frame must be adequately supported by concrete.

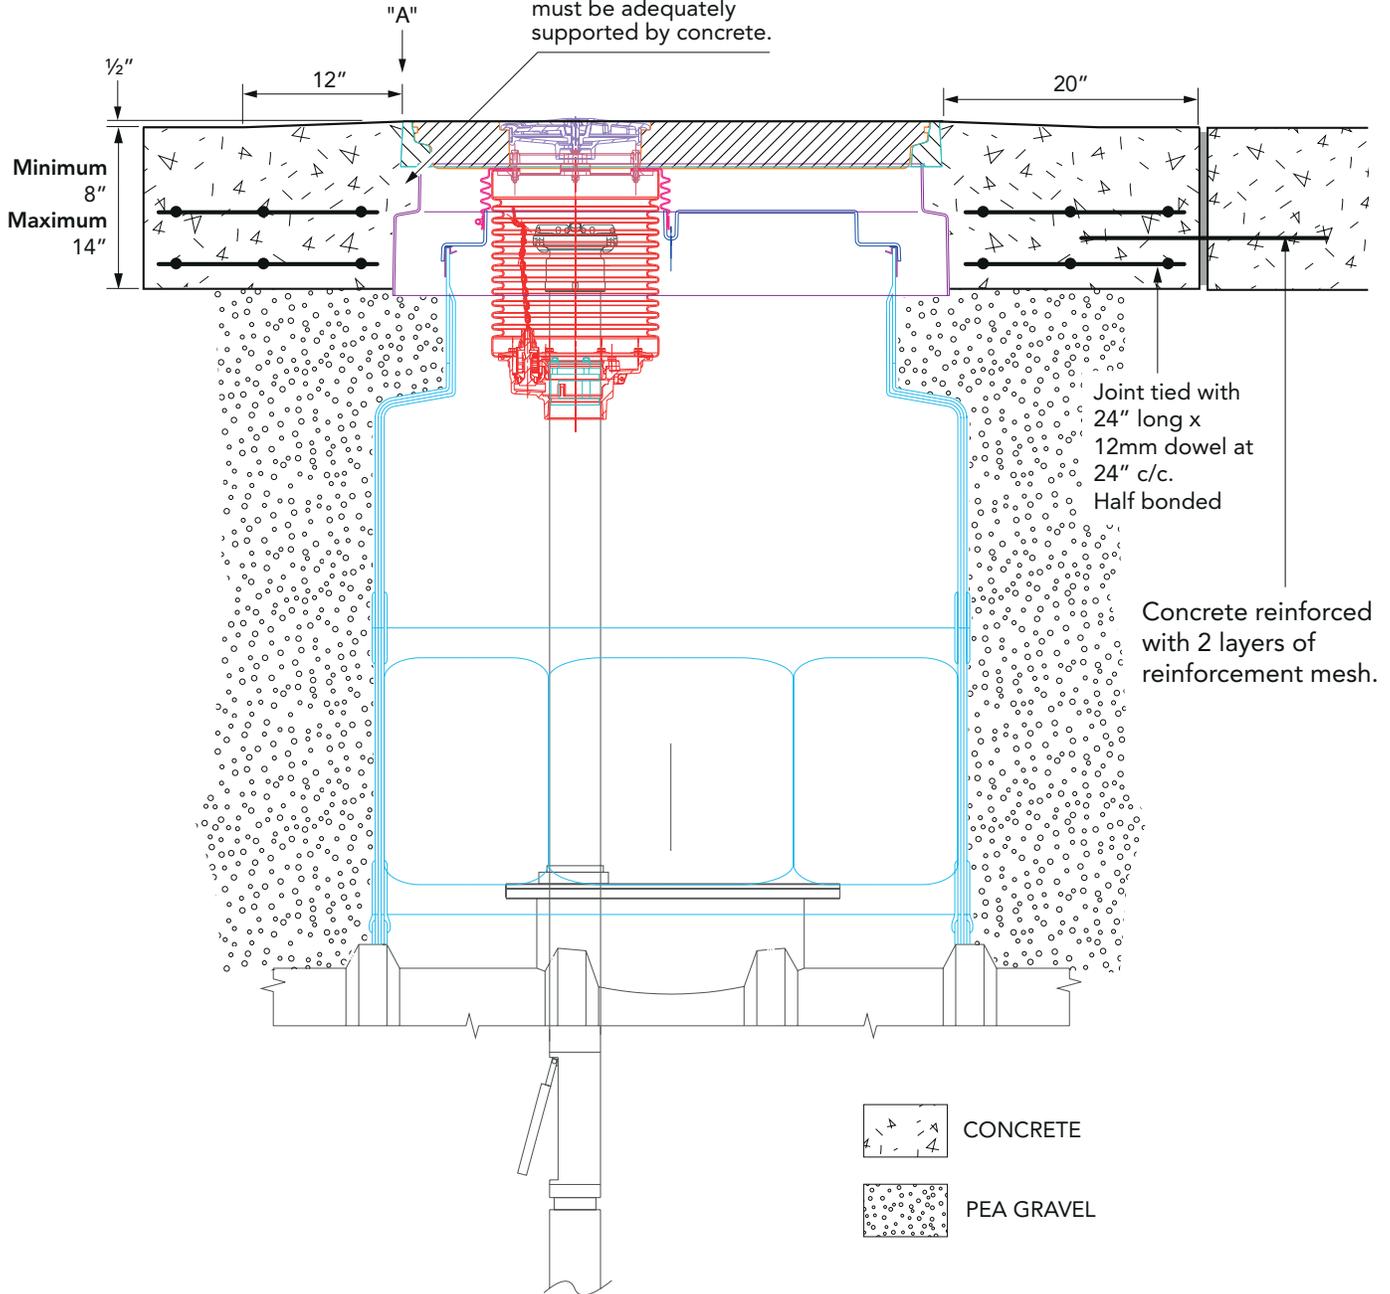

FibreTite multiport kit includes watertight platform for (1) 5-gallon spill bucket, 40" diameter offset cover, port cover, frame and skirt.

For reference purposes only. This drawing is not a specification. Order against product code only. To enable continuous improvement of our products, the designs and specifications are subject to change without notice.

FIBRELITE

PART OF OPW A DOVER COMPANY