


Materials

- Body:** Aluminum
- Lever & Lever Guard:** Duratuff®
- Packing:** Graphite with Teflon®
- Disc:** Viton®
- Spouts:** Aluminum
- Inlet Size:** 3/4" NPT
- Weight:** 2.85 lbs. each, 44.90 lbs./case of 15
1.3kg each, 20.4kg/case of 15

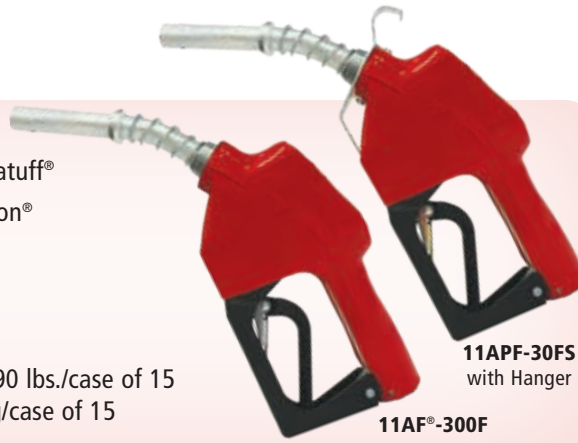

Features

- ◆ The new and improved farm hanger is now made from stamped metal and bolted to the nozzle, making it stronger and sturdier than ever.
- ◆ UL- and ULC-Listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
- ◆ New bleeder poppet orifices allow for use in transfer pumps with or without air elimination systems.
- ◆ Prevents consumer from jamming the nozzle in an open position – blocker on lever guard.
- ◆ Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.
- ◆ Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- ◆ Easy to open, even at high pressures utilizing Dual Poppets.
- ◆ Convenient – one-finger hold-open clip that is easy to set the flow rate. (not on all models)
- ◆ Works with self-priming and non self-priming pumps.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.
- ◆ When bushing from 1" hose on the 1A nozzle, use a 28S Bushing Adaptor

Ordering Specifications

Full Hand Insulator Color	Includes spout, hanger, spring and no hold-open rack		Includes spout, standard spring and no hold-open rack		Includes spout, hanger, spring and no hold-open rack	
	For Unleaded Service	For Diesel Service	For Unleaded Service	For Diesel Service	For Leaded Service	For Unleaded Service
Green		11AF-10FS				
Red	11APF-30FS		11AF-300F	11APF-300F		
Black	11APF-40FS	11AF-40FS			11AF-4FSC	11APF-4FSC

*Beginning April 30, 2015; nozzles without a no-pressure no-flow or interlock device may not be ULC listed with Hold-Open Clips.

Replacement Spout Kits

Product #	O.D.		Length		Weight		Used On
	in.	mm	in.	mm	lbs.	kg	
5BF-0112	15/16	24	7	178	.59	.27	11AF®-No Hook
5BS-2110	15/16	24	7	178	.59	.27	11AF® w/ Farm Hook
5BPF-0172	13/16	21	7	178	.59	.27	11APF-No Hook
5BPS-2117	13/16	21	7	178	.59	.27	11APF w/ Farm Hook



NEWGARD™ Kits See page 166.

OPW 11AF® 3/4" Automatic Nozzles

The OPW 11AF® Nozzle is a sturdy industry-proven standard used primarily for fueling up to 15 gallons per minute. The 11AF® is an automatic dispensing nozzle designed for use in transfer pump. This nozzle should not be used for retail applications, and does not include a No Pressure – No Flow or Interlock Device.

⚠ WARNING

Do not use OPW 11AF Nozzles for any retail application. It is only intended for use in non-retail applications. Use of foreign objects to hold open automatic nozzles could result in failure to shut off and personal injury.

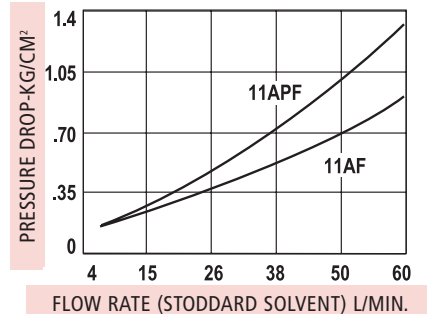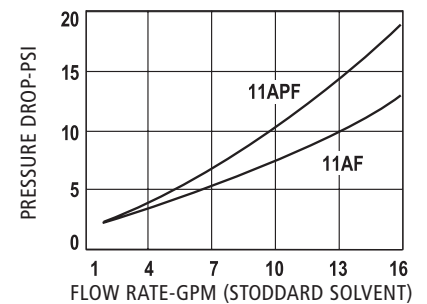

28S-0350
Bushing Adaptor



28R-2404
Bushing Adaptor

Listings and Certifications



See pages 283-291 for certification number