

Materials

Body: Zinc/aluminum
(44) aluminum
nickel-plated (44N)

Spring: Steel

Guide: Ceramic-filled plastic

Adaptor: Steel zinc-plated

Inlet and Outlet Size: 3/4" NPT




OPW 44 Flow Limiters



The OPW 44 Flow Limiters allow your customers to comply with the EPA 10 gpm maximum flow rate mandate which went into effect July 1, 1996. The OPW 44-0044 Flow Limiter is designed to control the maximum fuel flow rate to 10 gpm.

Features

- ◆ UL and ULC listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
 - ◆ Compact, attractive profile – for a sleek, modern appearance.
 - ◆ The OPW 44-0044 is designed to be installed at the dispenser outlet or between the dispenser and the breakaway valve, thus removing it from the abusive action sometimes seen at the nozzle.
 - ◆ A flow indication arrow – is indicated on the flow limiter for easy installation.
- Design working pressure**
- ◆ 50 psi (3.45 bar) maximum pressure.

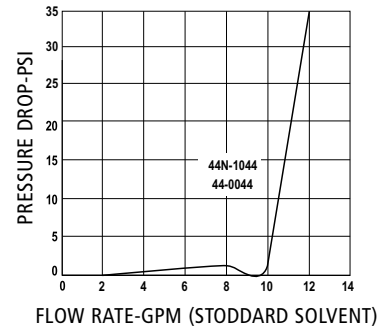

44-0044

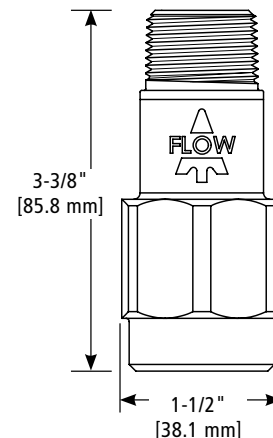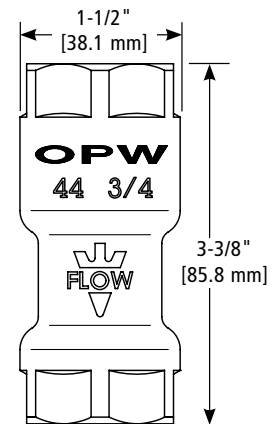

Ordering Specifications

Product #	Length	Weight	
	in.	lbs	kg
44-0044	3/4 F x 3/4 F (NPT)	1.2	.54

44 Series Instruction Sheet Order Number: **H12918PA**

NOTE: See OPW's Website at www.opwglobal.com for product instruction sheets, trouble-shooting guides, how-to-use guide and to view the Do's & Don'ts at the Gas Pump video.

**Listings and
Certifications**



See pages 283-291 for certification number