



Fiberglass Two-Piece Tank Sumps and Resin Kits


Injection Molded Fiberglass (FRP) Tank Sumps

Features & Benefits:

- ◆ **Structural Integrity** – engineered with thick walls and a structurally efficient geometry to withstand backfill and high water table forces. Precise glass/resin metering throughout the molding process ensures material consistency and maximizes the strength-to-weight ratio.
- ◆ **Smooth/Flat Sealing Surfaces for Leak-Tight Sump Entry Fittings** – male/female mold halves produce a uniform wall thickness while eliminating air entrapment. The result is a flat, smooth finish, both inside and out, which changes the integrity of the pipe entries.
- ◆ **Full Access Working Area** – two-piece design allows full access until top is attached after plumbing is complete.
- ◆ **Flexibility in Mounting** – sump can be mounted directly to a 42" FRP containment collar or with OPW Retail Fueling Sump Mounting Flanges.

Replacement Parts & Accessories

Part #	Description
H13257M	Knob
D02238	Cover
H13214M	Seal
D02223	Sump Top Assembly for TSMF-4536
D02229	Sump Top Assembly for TSDF-4536
E00779	Sump Bottom Assembly
CLC-33	Latched Fiberglass Tank Sump Lid

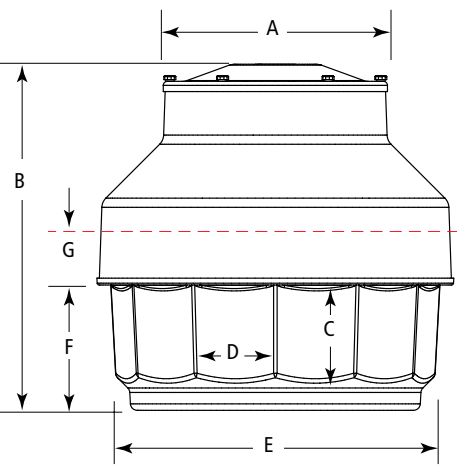

Ordering Specifications - Fiberglass Two-Piece Tanks Sumps & Resin Kits

Part #	Application	Dimensions										Sump Base Burial Depth				Weight			
		A Cover		B Height		C x D Panel		E Base		F Bottom Sump		G Max. Cutoff		max.	min.				
		in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	kg
TSMF-4536	Fiberglass Two-Piece Medium Bury Tank Sump, 36" x 45"	33	838	39	991	14x12	356 x 305	45	1,143	19	483	8.5	216	44	1,118	36	914	104	47
TSMF-4536CL	Fiberglass Medium Bury Tank Sump – Cover Latch	33	838	39	991	14x12	356 x 305	45	1,143	19	483	8.5	216	44	1,118	36	914	109	49
TSDF-4536	Fiberglass Two-Piece Deep Bury Tank Sump, 36" x 45"	33	838	50	1,270	14x12	356 x 305	45	1,143	19	483	10.5	267	55	1,397	45	1,143	108	49
TSDF-4536CL	Fiberglass Deep Bury Tank Sump – Cover Latch	33	838	50	1,270	14x12	356 x 305	45	1,143	19	483	10.5	267	55	1,397	45	1,143	113	51
RK-5000	Fiberglass Resin Kit (qt. size) – One Kit Required to Join Sump Base to Sump Top; One Kit Required to Join Sump Base to 42" FRP Tank Containment Collar.																		