





Autogas BNA-300A and BNA-300HGA Series LPG Nozzles

The BNA-300A and BNA-300HGA nozzles with Thumb Release are designed for the Italian-Type coupling. Nozzle inlet has 1" BSPP threads. Also available in brass models.



OT321

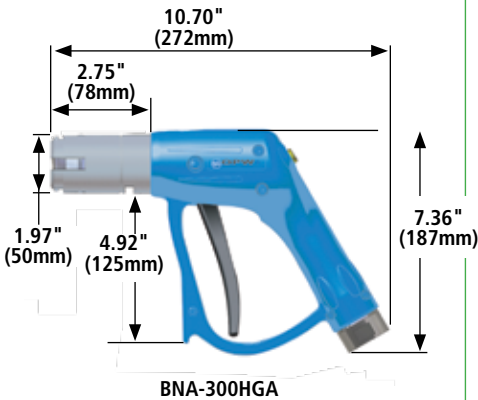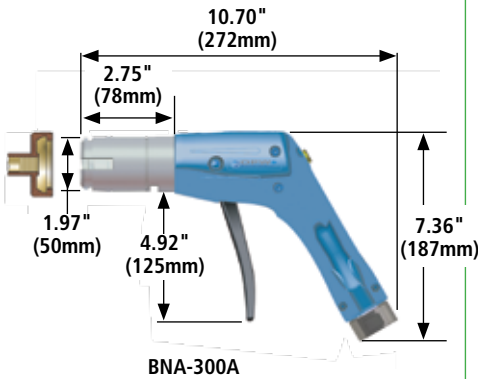

Materials

Body: Aluminum

Internal Components: Brass and steel

Seals: Specially formulated polymers and elastomers specific to LPG applications.

External Components: Aluminum and stainless steel



BNA-300HGA

BNA-300A

Features

◆ **User-Friendly Single-Action Operation**

- entire fueling operation is initiated by simply engaging nozzle to the receptacle with a single squeeze of the hand.

◆ **New Ergonomic Design** - 2 resin shells insulate and protect the internal parts from falls and the operator from the effects of the low temperature generated by the high-flow LPG.

Minimum effort is required to couple the nozzle and the ergonomic release button makes release easier. **BNA-300HGA comes with lever guard.**

◆ **Ease of Use** - incorporates a single plane 360° inlet swivel.

◆ **Low Vent Volume upon Disconnect:** 1.6cc

◆ **Replaceable Rubber Cover (optional)** - deflects venting LP gas away from operator's hand.

◆ **Nylon/Fiberglass Hand Insulator** - protects operator from low temperature effects.

◆ **Individually Leak Tested and Inspected with Traceable Serial Numbers**

Specifications:

MAWP: 362 psi (25 bar)

LPG Discharge on Disconnect: Less than 1 cm³

Locking Release: Push Button on Body

Coupling Style: Italian Style

Temperature Range: -40° F to 212° F
(-40° C to 100° C)

Ordering Specifications

Product #	Inlet Thread Size	Service Pressure		Weight
BNA-300A	1" BSPP	362 psi	25 bar	3.41 lbs. (1.55 kg)
BNA-300HGA	1" BSPP	362 psi	25 bar	3.52 lbs. (1.60 kg)
OT321	3/4" - 14 BSPP Female x 1" - 11 BSPP Male			
OT420	Replaceable Rubber Cover			