

OPW 634 Series Tight-Fill Top-Seal Caps


Tight-Fill Top-Seal Caps are installed on top-seal adaptors, when not in use, to prevent gasoline vapors from escaping and to prevent water, dust and debris from entering the tank.



EVR Approved for E85

Materials

- Cap & Links: Duratuff®
- Pins: Stainless-steel
- Gasket: Nitrile
- Color: Grey

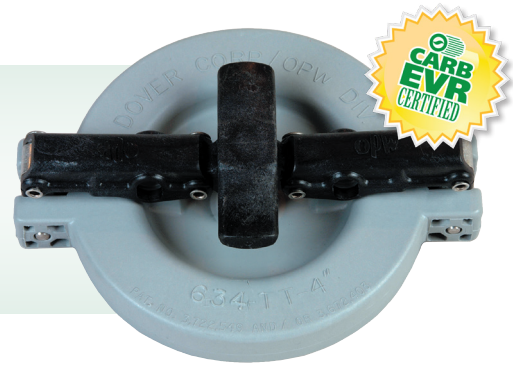


Ordering Specifications

Product #	in.	mm	lbs.	kg
634TT-7085-EVR	4	102	1.01	.46

Replacement Parts

Part #	Description
H15005M	Nitrile Gasket

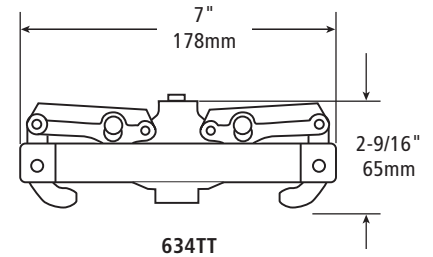

NOTE: Effective height above adaptor: 1-19/32"

OPW 634TT

The OPW 634TT is designed to mate with 4" 633T, 633TE, 61SA, 633TC, and 633TCP Top-Seal Adaptors. Heavy-duty and corrosion-resistant, the body is made of Duratuff® to help eliminate rust and oxidation for a long, maintenance-free life. The toggle lever distributes downward pressure to compress its Buna-N gasket evenly, ensuring a positive, water and vapor-tight seal. The 634TT can be locked with a padlock or wire seal.


The OPW 633TE adaptor is similar to the 633T, except it does not have internal wrenching lugs.

OPW 634TT - Metal

The 634TT-4000 is a metal top-seal cap with the same dimensions as the 634TT-7085.

Materials

- Cap: Die-cast zinc (powder-coated black)
- Lever: Duratuff®
- Pins: Stainless-steel
- Gasket: Nitrile

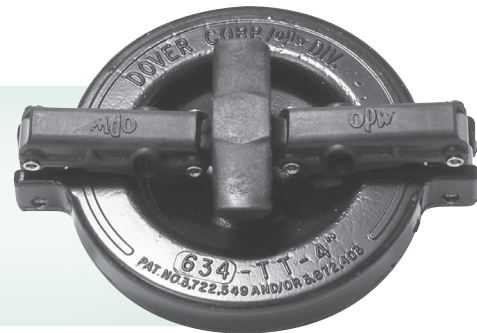


Ordering Specifications

Product #	in.	mm	lbs.	kg
634TT-4000	4	102	1.01	.46

Replacement Parts

Part #	Description
H15005M	Gasket for 634TT-4000

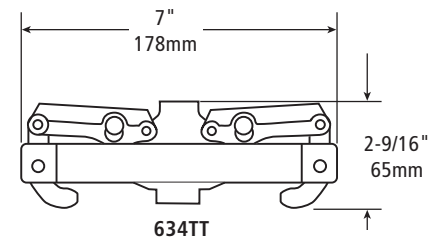

Listings and Certifications



OPW 634TT & 634LPC are EVR Approved for E85

