


DEV R Models – Fill Port with Drain-Valve

Duratuff® II Base with Drain-Valve Models


Model #	Gal.	Liter	Cover	lbs.	kg
1-2100-DEV R	5	19	Aluminum	40	18
1C-2100-DEV R	5	19	Cast-Iron	53	24
1-2115-DEV R	15	57	Aluminum	47	21
1C-2115-DEV R	15	57	Cast-Iron	60	27

Cast-Iron Base with Drain-Valve Models

Model #	Gal.	Liter	Cover	lbs.	kg
1-2100C-DEV R	5	19	Aluminum	40	18
1C-2100C-DEV R	5	19	Cast-Iron	53	24
1-2115C-DEV R	15	57	Aluminum	47	21
1C-2115C-DEV R	15	57	Cast-Iron	60	27

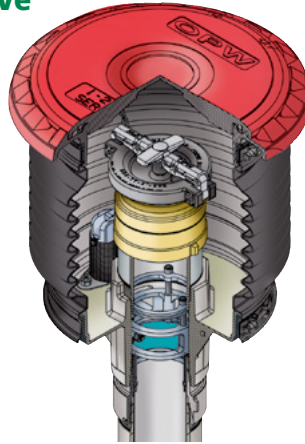

1-2100-DEV R Series
Product Fill Spill-Container

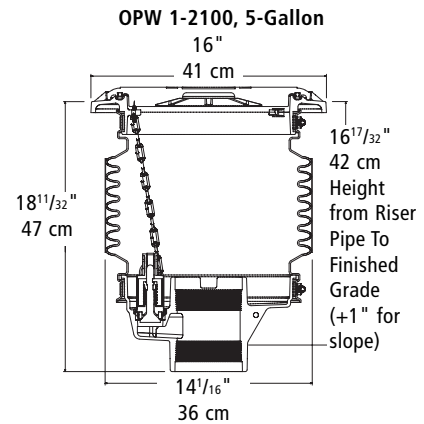

OPW 1-2100, 5-Gallon


PEVR Models – Vapor Port with Plug

Duratuff® II Base with Plug Models


Model #	Gal.	Liter	Cover	lbs.	kg
1-2100-PEVR	5	19	Aluminum	40	18
1C-2100-PEVR	5	19	Cast-Iron	53	24

Cast-Iron Base with Plug Models

Model #	Gal.	Liter	Cover	lbs.	kg
1-2100C-PEVR	5	19	Aluminum	40	18
1C-2100C-PEVR	5	19	Cast-Iron	53	24

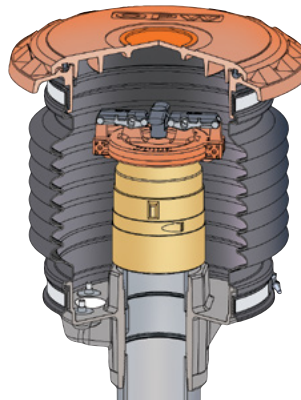

1-2100-PEVR Series
Vapor Recovery Spill-Container

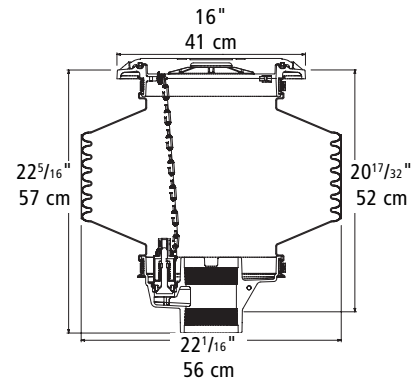

OPW 1-2115, 15-Gallon

*Subtract 2" from height dimension for Cast-Iron Base Models.

NOTE: 20 17/32" dimension is height from riser pipe to finish grade (+1" for slope)



4" Threaded Nipples
for Mating Spill Bucket
to Adaptor


Part #	Description
TC-400	4" Torque Cap
H15144M	4" NPT Nipple, 4" Length
H12806M	4" NPT Nipple, 5" Length
VPN4X7	4" NPT Nipple, 7" Length
H15271M	4" NPT Nipple, 8" Length
H15268M	4" NPT Nipple, 10" Length

Replacement Parts

Part #	Description
1DK-2100-EVR	Drain-Valve Kit
1-21AC	Aluminum Cover w/ Seal
1-21CC	Cast-Iron Cover w/ Seal
H12229M	Cover Seal
1PPK-2100	Hand Pump & Plug Kit for 1-2100
1DP-2100	Replacement Drain Plug Kit for 1-2100

Add the following to part number for color powder-coated 1-21CC covers

☐ White	-W	☐ Orange	-O	☐ Yellow	-Y
☐ Red	-R	☐ Blue	-B	☐ Bronze	-BZ

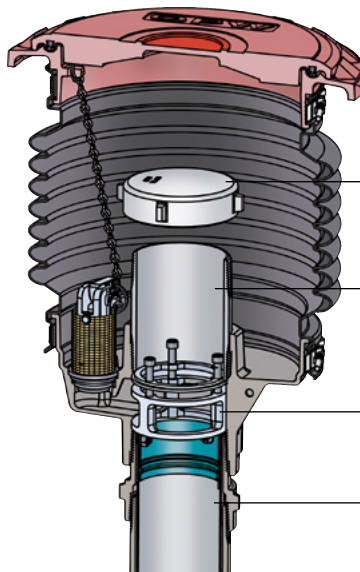

TC-400 Torque Cap

Provides an easy means of threading a 4" NPT nipple into a spill-container. The OPW TC-400 coupled with the OPW 61SA-TOOL can provide the necessary torque requirements for installing adaptor nipples for spill-containers. The TC-400 can easily be removed without disturbing the installed threaded nipple. The TC-400 also eliminates the need for a strap or chain wrench.

4" Threaded Pipe Nipple

OPW pipe nipples are CNC machined, providing a smooth sealing surface where a gasket seal exists. Available in various lengths to custom fit the necessary height requirements for Fill and Vapor Adaptors.

61JSK Jack Screw Device

FSA-400 Face Seal Adaptor

The following products are in compliance with California Water Resources Control Board (W.R.C.B.) for coating of buried metal components, such as stainless-steel clamps or entire Spill-Containment Bucket bottoms.

Part #	Description
SL-1100	Urethane Sealant (10.3 oz.)
W.R.C.B. approved CCR Title 23, Div. 16, Sec. 1631 & 2636	