
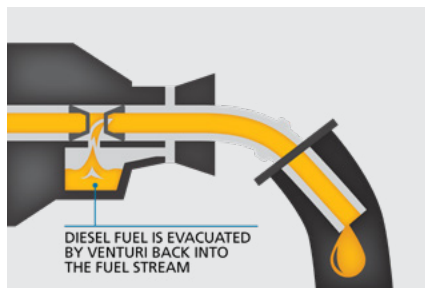
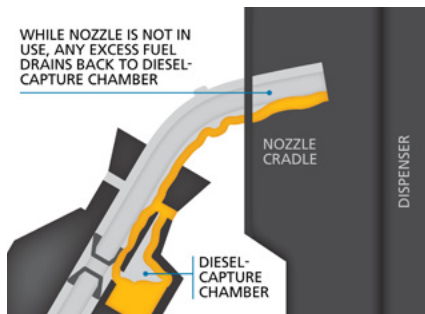
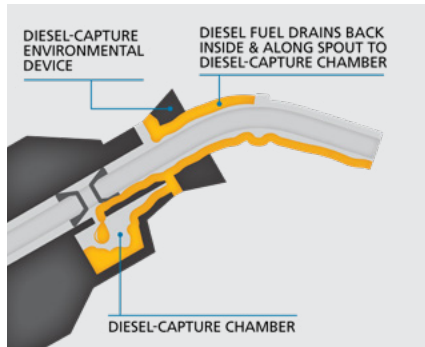


OPW 14C Diesel-Capture Technology Nozzle


The OPW 14C is part of the new OPW 14 Series cleaner fueling experience nozzles, featuring innovative patented* diesel-capture technology. This innovation is designed to provide a cleaner, greener fueling experience for customers while keeping diesel fuel off their hands and off the ground.

Diesel-Capture Technology

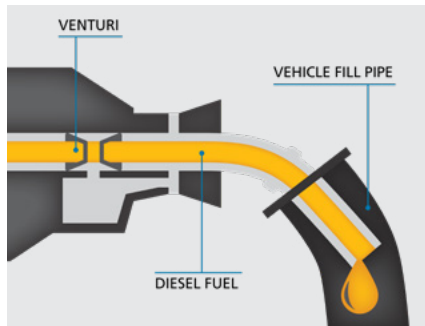

MATERIALS

Body: Aluminum
Lever & Lever Guard: Duratuff®
Packing: Graphite with Teflon®
Disc: Viton®
Spout: Aluminum
Inlet Size: 3/4" NPT
Weight: 2.73 lbs. each
 1.25 kg each
Case Count: 10

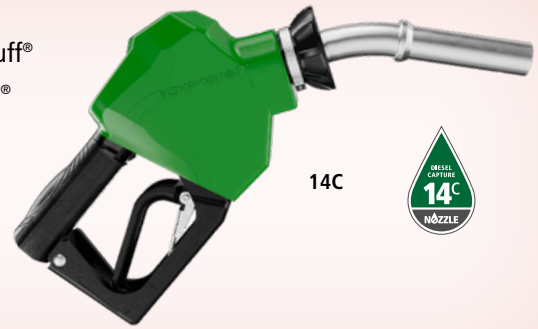

FEATURES & BENEFITS

Safe for Use

- ◆ Diesel-Capture Technology* – the patented technology allows excess diesel fuel to drain into a uniquely engineered chamber located in the body of the nozzle located at the base of the spout. This excess diesel fuel is then introduced back into the fuel stream.
- ◆ Drip Guard – designed to capture any fuel that runs out onto the outside of the nozzle.
- ◆ Compatible for diesel-fuel blends up to B20.
- ◆ Rugged Durability – designed to meet the rigorous demands of high-volume sites.
- ◆ FlowLock™ allows nozzle to shut off when falling out of a vehicle or is tipped up, limiting spillage and unsafe conditions.

Recently re-designed with new features, OPW 14C nozzles now include:

- ◆ A patented easy-open feature with a reduced opening force (US Pat: 12,227,408).
- ◆ A new ergonomically designed grip featuring a new barrel cover and lever.

Durable and Long-Lasting Design

- ◆ Cycle tested and proven to last longer than 1 million cycles.
- ◆ Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.

Cleaner Fueling Experience for the Customer

- ◆ Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- ◆ Attractive two-piece hand-insulator which includes NEWGARD™ barrel cover and colored scuff guard, is the most comfortable nozzle in the industry to use.
- ◆ Convenient – one-finger hold-open clip that is easy to set the flow rate.

Design Working Pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

LISTINGS & CERTIFICATIONS



*US PATENTS 7,134,580 AND 9,126,820.
 OTHER PATENTS-PENDING





ORDERING SPECIFICATIONS

Scuff Guard Color	14C Diesel Nozzles
Green	14C-0100
Red	14C-0300
Black	14C-0400
Blue	14C-0500
Yellow	14C-0900

OPW 14HC Hi-Flo Diesel-Capture Technology Nozzle


The OPW 14HC Hi-Flo is part of the new OPW 14 Series cleaner fueling experience nozzles, featuring innovative patented* diesel-capture technology. This innovation is designed to provide a cleaner, greener fueling experience for retail and commercial high-speed truck-stop lanes.

Diesel-Capture Technology

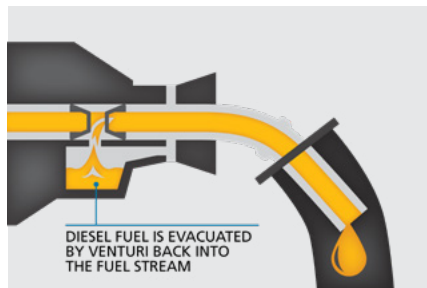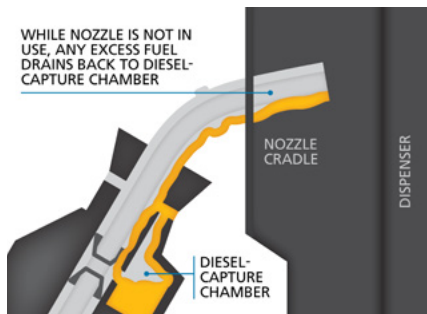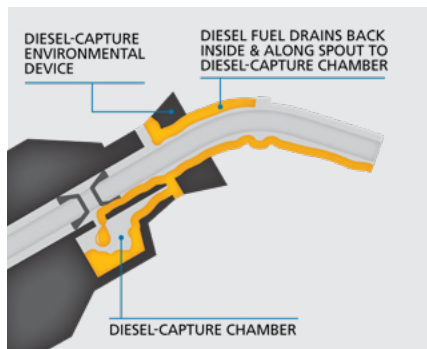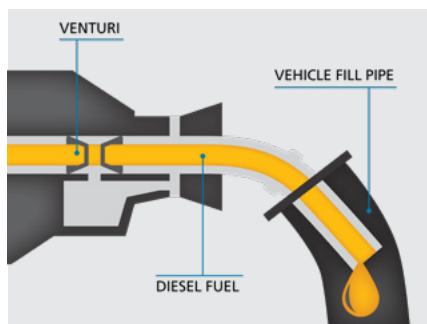

MATERIALS

- Body:** Aluminum
- Lever & Lever Guard:** Duratuff®
- Packing:** Graphite with Teflon®
- Disc:** Viton®
- Spout:** Aluminum
- Inlet Size:** 1" NPT
- Weight:** 2.73 lbs. each
1.25 kgs. each
- Case Count:** 10

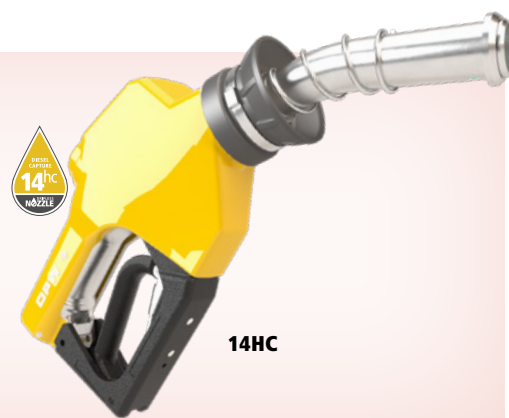

FEATURES & BENEFITS

Safe for Use

- ◆ Diesel-Capture Technology* – the patented technology allows excess diesel fuel to drain into a uniquely engineered chamber located in the body of the nozzle located at the base of the spout. This excess diesel fuel is then introduced back into the fuel stream.
- ◆ Drip Guard – designed to capture any fuel that runs out onto the outside of the nozzle.
- ◆ Compatible for diesel-fuel blends up to B20.
- ◆ Rugged Durability – designed to meet the rigorous demands of high-volume sites.
- ◆ FlowLock™ allows nozzle to shut off when falling out of a vehicle or is tipped up, limiting spillage and unsafe conditions.

Durable and Long-Lasting Design

- ◆ Cycle tested and proven to last longer than 1 million cycles.
- ◆ Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.

Cleaner Fueling Experience for the Customer

- ◆ Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- ◆ Attractive two-piece hand-insulator which includes NEWGARD™ barrel cover and colored scuff guard, is the most comfortable nozzle in the industry to use.
- ◆ Convenient – one-finger hold-open clip that is easy to set the flow rate.

Design Working Pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

ORDERING SPECIFICATIONS

B-20 Nozzles compatible up to B20 (20% Biodiesel)

Hand Warmer Color	14HC 1" Truck	14HC Extreme Cold 1" Truck	14HC Canada Nozzle, Extreme Cold, NoText
Green	14HC-0100	14HC-0100-XC	14HC-0100NC-XC
Black	14HC-0400	14HC-0400-XC	14HC-0400NC-XC
Yellow	14HC-0900	14HC-0900-XC	14HC-0900NC-XC

Listings and Certifications



*US PATENTS 7,134,580 AND 9,126,820.
OTHER PATENTS-PENDING

GPM FLOW CHART

