

Materials

Body: Aluminum nickel-plated
Spring: Steel zinc-plated
Guide: Ceramic-filled plastic
Adaptor: Steel zinc-plated
Inlet and Outlet Size: 3/4" NPT



44-0044

44N-1044

OPW 44 Flow Limiters

The OPW 44 Flow Limiters allow your customers to comply with the EPA's 10-gallon maximum flow-rate mandate which went into effect July 1, 1996. The OPW 44-0044 Flow Limiter is designed to control the maximum fuel flow rate to 10 gpm.

Features


- ◆ UL and ULC-listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
- ◆ Compact, attractive profile – for a sleek, modern appearance.
- ◆ Includes a 3/4" NPT pipe nipple.
- ◆ The OPW 44-0044 is designed to be installed at the dispenser outlet or between the dispenser and the

breakaway valve, thus removing it from the abusive action sometimes seen at the nozzle.


- ◆ A flow-indication arrow – is indicated on the flow limiter for easy installation.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

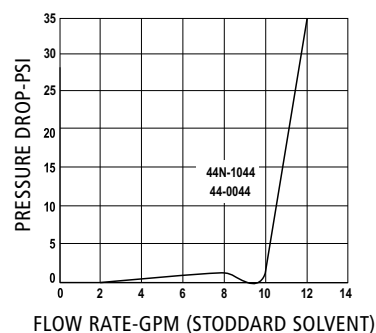

44-0044

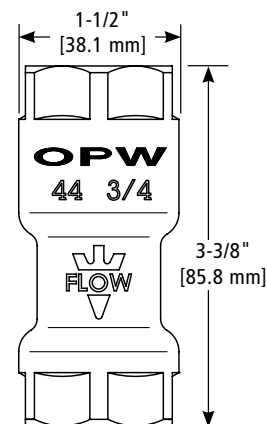

Ordering Specifications

Product #	Length	Weight	
	in.	lbs	kg
44-0044	3/4 F x 3/4 F (NPT)	1.2	.54

44 Series Instruction Sheet Order Number: **H12918PA**

NOTE: See OPW's Website at opwretailfueling.com for product instruction sheets, troubleshooting guides, how-to-use guide and to view the Do's & Don'ts at the Gas Pump video.

Listings and Certifications

