


## Materials

Cap: Duratuff®


Adaptor Ring:  
Cast aluminum

634TTM



## Ordering Specifications

| Product #   | lbs. | kg  |
|-------------|------|-----|
| 634TTM-7087 | 1.42 | .65 |

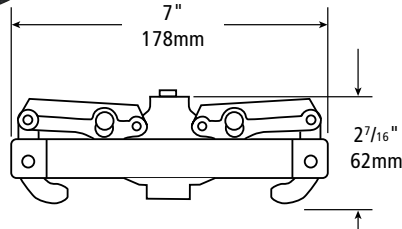


## OPW Monitoring Well/ Pipe Caps

### OPW 634TTM Well Cap Kit

The OPW 634TTM Well-Cap Kit is designed to install onto a 4" slotted PVC monitoring-well. The cap is marked "Do Not Fill" to clearly identify the monitoring-well. A cast-aluminum adaptor ring is set-screwed to the top of the slotted PVC well, and the cap mates with the ring. The 634TTM can be locked with a padlock or a wire seal.



62PMC

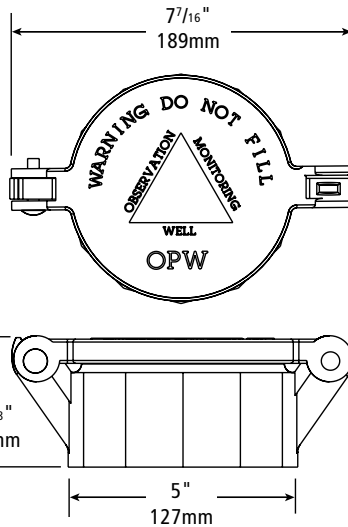

## Ordering Specifications

| Product #  | Description    | lbs. | kg  |
|------------|----------------|------|-----|
| 62PMC-0400 | Monitoring Cap | 1.3  | .59 |

### OPW 62PMC Lockable Monitoring Cap

The OPW 62PMC is designed to thread or solvent-weld to a 61SPVC 4" slotted PVC monitoring-well pipe. The 62PMC is constructed of durable PVC with a stainless-steel hinge pin for resistance to rust and corrosion. An API warning statement, "Monitoring-Well...Do Not Fill," is permanently molded into the cap. The 62PMC can be locked with a long-shank padlock.

61SPVC



## Ordering Specifications

| Product #    | Description               | Length |      | Slotted Section |      | Weight |      |
|--------------|---------------------------|--------|------|-----------------|------|--------|------|
|              |                           | ft.    | m    | ft.             | m    | lbs.   | kg   |
| 61SPVC-4000  | 4" x 13' Slotted PVC Pipe | 13     | 3.96 | 10              | 3.04 | 26.5   | 12.0 |
| 61SPVC-4015  | 4" x 15' Slotted PVC Pipe | 15     | 4.57 | 12              | 3.65 | 30.5   | 13.8 |
| 61SPVC-4020* | 4" x 20' Slotted PVC Pipe | 20     | 6.09 | 18              | 5.48 | 41.0   | 18.6 |

\*20 ft. Models come in two (2) 10 ft. pieces.

### OPW 61SPVC Slotted PVC Pipe

The OPW 61SPVC Slotted PVC Pipe is designed for monitoring-well applications. The 61SPVC is constructed of durable Schedule 40 PVC pipe, PVC bottom plug with slot thickness of .020".

634TTM-7087 Instruction Sheet Order Number: **H10772PA**