

FlexWorks Supply Piping

Why flex pipe?

OPW developed FlexWorks pipe in response to customer feedback. You asked and we delivered! The pipe is more flexible, lighter and has reduced memory. Pipe can also be replaced without breaking concrete.

Elimination of potential underground leak points

- ◆ No underground fittings or joints
- ◆ No hand-built field joints
- ◆ All termination points are contained safely inside sumps
- ◆ Termination joints are precision coupled to simulate factory-made assemblies

Light, Flexible & Easy to Install. ULc Approved for All Fuels

ULc APPROVAL


- ✓ Motor Vehicle Fuels
- ✓ High Blend Fuels
- ✓ Concentrated Fuels
- ✓ Aviation and Marine

Double-Wall Flexible Vent Piping: UL971-Listed, Integral Primary/Secondary, Normal Vent & Vapor Piping, Gasoline, Aviation & Marina Fuels:

A UL-listed, double-wall, flexible supply piping system is designed for installation within access piping (not required but recommended). The outer containment pipe includes inner stand-off ribs to create a small interstitial space which allows for optimum fluid migration, continuous monitoring and easy periodic testing. This piping features an enhanced construction that meets the new UL971 standard. OPW's FlexWorks double-wall piping has both the primary and secondary containment pipe UL-listed and is labeled as follows:
INTEGRAL PRIMARY/SECONDARY FOR MOTOR VEHICLE FUELS.



THE WORLD'S MOST SPECIFIED FLEXIBLE FUEL-TRANSFER PIPE

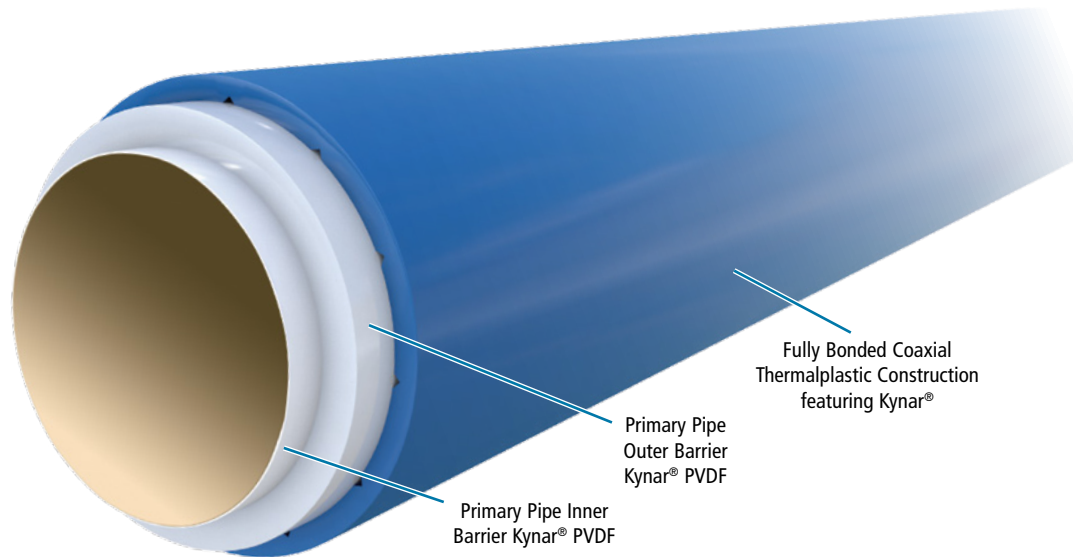

What Makes This Pipe Different? Lower installation costs

- ◆ Eliminates the hassles – installation time and potential leak points of rigid pipe installations
- ◆ Fast and easy installation – results in less installation labor, time and cost
- ◆ Eliminates burdensome cutting, fitting, and cleaning
- ◆ No adhesives – heat assists, curing problems or electrofusion welding of joints
- ◆ Easy to bend – no special fittings to install in order to make bends

Flexible Piping Manual Order
Number: UPM-0001

FlexWorks Supply Piping

OPW's FlexWorks Pipe is more flexible, lighter and has reduced memory to aid installation and is UL approved for all fuels.

Ordering Specifications - Sizing Matrix

Double Wall Pipe

Part #	Description	Packaged		Box/Reel Size		Box/Reel Weight		Specifications
				In.		lbs.	kg	
C075A-250	3/4" Double Wall Primary Pipe	250 ft	Box	44x44x25		134	61	
C075A-1000	3/4" Double Wall Primary Pipe	1000 ft	Reel	58x58x48		527	239	
C075A-CLXXX	3/4" Double Wall Primary Pipe	10-990 ft	Box					Custom Box/ Reel 10-990 ft (XXX enter feet in 10 ft increments)
C10A-250	1" Double Wall Primary Pipe	250 ft	Box	44x44x25		169	77	
C10A-1000	1" Double Wall Primary Pipe	1000 ft	Reel	58x58x48		605	724	
C10A-CLXXX	1" Double Wall Primary Pipe	10-990 ft	Box					Custom Box/Reel 10-990 ft (XXX enter feet in 10 ft increments)
C15A-250	1.5" Double Wall Primary Pipe	250 ft	Reel	38x45x30		240	109	
C15A-350	1.5" Double Wall Primary Pipe	350 ft	Reel					
C15A-375	1.5" Double Wall Primary Pipe	375 ft	Reel					
C15A-500	1.5" Double Wall Primary Pipe	500 ft	Reel	58x58x48		605	274	
C15A-1000	1.5" Double Wall Primary Pipe	1000 ft	Reel	58x58x48		980	444	
C15A-1400	1.5" Double Wall Primary Pipe	1400 ft	Reel					
C15A-1225	1.5" Stick Pipe Double Wall - 25 ft	25 ft each	12 per Box					Sold Box of 12 – Minimum order 300 ft
C15A-1228	1.5" Stick Pipe Double Wall - 28 ft	28 ft each	12 per Box					Sold Box of 12 – Minimum order 336 ft
C15A-1230	1.5" Stick Pipe Double Wall - 30 ft	30 ft each	12 per Box					Sold Box of 12 – Minimum order 360 ft
C15A-1233	1.5" Stick Pipe Double Wall - 33 ft	33 ft each	12 per Box					Sold Box of 12 – Minimum order 396 ft
C20A-250	2" Double Wall Primary Pipe	250 ft	Reel	63x63x33		192	87	
C20A-375	2" Double Wall Primary Pipe	375 ft	Reel					
C20A-500	2" Double Wall Primary Pipe	500 ft	Reel	68x68x48		770	349	
C20A-800	2" Double Wall Primary Pipe	800 ft	Reel					
C20A-1225	2" Stick Pipe Double Wall - 25 ft	25 ft each	12 per Box					Sold Box of 12 – Minimum order 300 ft
C20A-1228	2" Stick Pipe Double Wall - 28 ft	28 ft each	12 per Box					Sold Box of 12 – Minimum order 336 ft
C20A-1230	2" Stick Pipe Double Wall - 30 ft	30 ft each	12 per Box					Sold Box of 12 – Minimum order 360 ft
C20A-1233	2" Stick Pipe Double Wall - 33 ft	33 ft each	12 per Box					Sold Box of 12 – Minimum order 396 ft
C30A-100	3" Double Wall Primary Pipe	100 ft	Reel					
C30A-250	3" Double Wall Primary Pipe	250 ft	Reel	63x63x33		192	87	
C30A-375	3" Double Wall Primary Pipe	375 ft	Reel					
C30A-500	3" Double Wall Primary Pipe	500 ft	Reel	68x68x48		770	349	
C30A-550	3" Double Wall Primary Pipe	550 ft	Reel					
C30A-0522	3" Stick Pipe Double Wall - 22 ft	22 ft each	Box					Sold Box of 5 - Minimum order 110 ft
C30A-0528	3" Stick Pipe Double Wall - 28 ft	28 ft each	Box					Sold Box of 5 - Minimum order 140 ft

Double Wall Vent Pipe

V20-125	2" Double Wall Vent Pipe	125 ft	Reel					
V20-250	2" Double Wall Vent Pipe	250 ft	Reel					
V20-500	2" Double Wall Vent Pipe	500 ft	Reel					
V30-125	3" Double Wall Vent Pipe	125 ft	Reel					
V30-250	3" Double Wall Vent Pipe	250 ft	Reel					
V30-500	3" Double Wall Vent Pipe	500 ft	Reel					

Product #	Size		Description	Minimum Bend Radius		Working Pressure		Temperature Rating		Burst Pressure	Max Vacuum for Suction
	in.	cm		in.	mm	PSIG	Bar	F	C		
C075A	3/4	1.9	Double-Wall Primary Pipe	18	457	145	10 bar	-20° to +120° F	-29° to +49° C	Exceeds 5X Working Pressure	26" of Mercury for All Pipe
C10A	1	2.54	Double-Wall Primary Pipe	18	457	125	8.6 bar				
C15A	1.5	3.8	Double-Wall Primary Pipe	24	610	100	6.9 bar				
C20A / V20	2	5	Double-Wall Primary Pipe / Vent Pipe	36	914	75	5 bar				
C30A / V30	3	7.6	Double-Wall Primary Pipe	72	1828	75	5 bar				

Note: Discounted short runs available while supplies last. Please contact Customer Service for availability and pricing.

* OPW also offers short and custom lengths of pipe, as well as pipe packaged and shipped on Mega Reels. Please contact our Customer Service department at 1-800-422-2525, or visit us on the web at www.opwglobal.com for the most up-to-date information.

Listings and Certifications

