

Materials

Body: Aluminum
Lever & Lever Guard: Duratuff®
Packing: Graphite with Teflon®
Disc: Viton®
Spouts: Aluminum
Inlet Size: 3/4" NPT
Weight: 2.85 lbs. each, 44.90 lbs./case of 15
 1.3kg each, 20.4kg/case of 15



OPW 11AF® 3/4" Automatic Nozzles

The OPW 11AF® Nozzle is a sturdy industry-proven standard used primarily for fueling up to 15 gallons per minute. The 11AF® is an automatic dispensing nozzle designed for use in transfer pump. This nozzle should not be used for retail applications, and does not include a No-Pressure - No-Flow or Interlock Device.

Features



- ◆ The new and improved farm hanger is now made from stamped metal and bolted to the nozzle, making it stronger and sturdier than ever.
- ◆ UL- and ULC-listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
- ◆ New bleeder poppet orifices allow for use in transfer pumps with or without air-elimination systems.
- ◆ Prevents consumer from jamming the nozzle in an open position – blocker on lever guard.
- ◆ Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.
- ◆ Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- ◆ Works with self-priming and non-self-priming pumps.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

WARNING

Do not use OPW 11AF Nozzles for any retail application. It is only intended for use in non-retail applications. Use of foreign objects to hold open automatic nozzles could result in failure to shut off and personal injury.

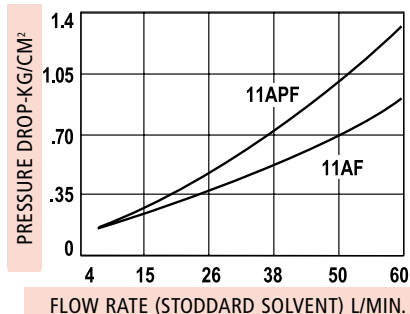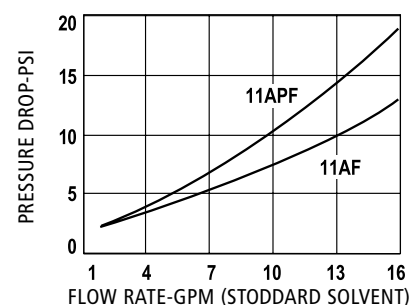

Ordering Specifications

Full Hand Insulator Color	Includes spout, hanger, spring and no hold-open rack		Includes spout, standard spring and no hold-open rack	Includes spout, hanger, spring, no hold-open rack and no trigger	Includes spout, hanger, spring and no hold-open rack
	For Unleaded Service	For Diesel Service	For Unleaded Service	For Leaded Service	For Unleaded Service
Green		11AF-10FS			
Red	11APF-30FS		11APF-300F		
Black	11APF-40FS	11AF-40FS		11AF-4FSC	11APF-4FSC

*Beginning April 30, 2015; nozzles without a no-pressure no-flow or interlock device may not be ULC-listed with Hold-Open Clips.

Replacement Spout Kits

Product #	O.D.		Length		Weight		Used On
	in.	mm	in.	mm	lbs.	kg	
5BF-0112	15/16	24	7	178	.59	.27	11AF®
5BPF-0172	13/16	21	7	178	.59	.27	11APF

Listings and Certifications



Bushing Adaptor Reducer for 1" Hose
28S-0350

Farm Hook Replacement Kit
3AF-0400