


OPW 199ASV Anti-Siphon Valve

The OPW 199ASV Anti-Siphon Valve is designed to help prevent siphoning of an aboveground storage tank should a leak or break occur in the fuel-supply line. The 199ASV installs on the top of an aboveground storage tank with a suction rod on the inlet and the fuel-supply line (to a remote pump) on the outlet of the valve. A poppet in the valve remains normally closed, isolating the tank from siphoning. When the remote pump is activated, it overcomes a factory-adjusted spring set to a predetermined hydrostatic head pressure and allows flow of fuel out of the AST. An internal pressure relief valve helps absorb thermal expansion in the fuel-supply line. The 199ASV is available in female NPT threads with four different factory-adjusted hydrostatic head-pressure settings.

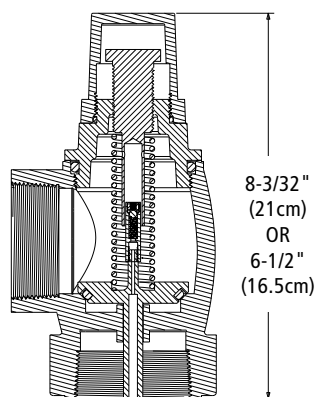

- ◆ 8³/₃₂" model for 1¹/₂" and 2" (20.55 cm model for 3.81 cm and 5.08 cm)
- ◆ 6¹/₂" model for 3/4" and 1" (16.51 cm model for 1.90 cm and 2.54 cm)

Materials

Body: Clear anodized aluminum
Bonnet: Powder-coated aluminum
Cap: Powder-coated aluminum
Spring: Stainless steel
Poppet: Hard-coated aluminum
Screw: Hard-coated aluminum
Poppet Seal: Nitrile



199ASV

Features

- ◆ **Factory-Adjusted Hydrostatic Head-Pressure Settings** – allow for quick, safe and easy installation on aboveground tanks
- ◆ **Internal Pressure Relief Valve** – helps protect piping and fittings from damage due to thermal expansion. Set to operate between 20 to 40 PSI (1.3 to 2.7 bar)
- ◆ **Aluminum Bodies** – compatible with gasoline, diesel, kerosene, ethanol, methanol, fuel oil and jet fuels
- ◆ **Temperature Rating** – -20°F - 120°F (-29°C - 49°C)

Valve Rating
ft of gasoline
S.G. = 0.7

Approximate Cracking Pressure


	PSI	ft. H ₂ O	in. H ₂ O	in. Hg	ft. Gas	ft. Diesel
0-5	1.88	4.33	51.96	3.85	6.2	5.35
5-10	3.68	8.48	101.76	7.53	12.12	10.47
10-15	5.6	12.92	155.04	11.47	18.51	15.95
15-20	7.4	17.07	204.84	15.16	24.4	21.07

*Note: Some suction pumps may not have enough horsepower to open valve properly.

Ordering Specifications

Product #	in.	mm	lbs.	kg	Hydrostatic Head Pressure* (Dimension A)
199ASV-1150	1 ¹ / ₂	38	2.0	.907	0'-5'
199ASV-2150	1 ¹ / ₂	38	2.0	.907	5'-10'
199ASV-3150	1 ¹ / ₂	38	2.0	.907	10'-15'
199ASV-1200	2	51	2.0	.907	0'-5'
199ASV-2200	2	51	2.0	.907	5'-10'
199ASV-3200	2	51	2.0	.907	10'-15'

*Note: Head Pressure calculated for gasoline.

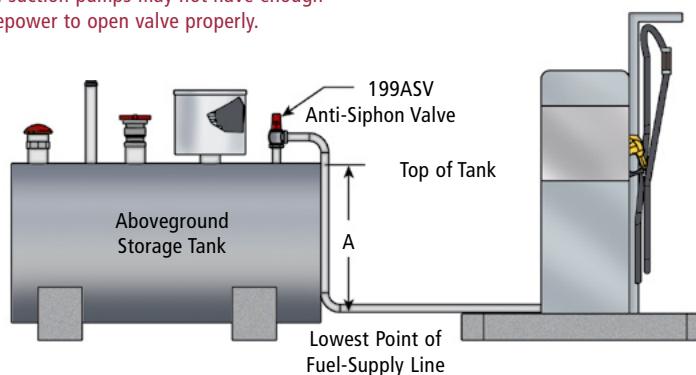

Listings and Certifications



Warning: Do not disassemble.
Do not field adjust.