

Materials

Body: Die-cast zinc
Protective Sleeves: Impact-modified nylon
Main Seals: Viton®
Main Spring: Stainless-steel
Guide and Poppets: Acetal
Weight: 0.97 lbs., 0.44 kg **66CLP-5100**



California Air Resources
Board Certified – Executive
Order VR-203-N & VR-204-N

OPW 66CLP Balance Phase II Enhanced Vapor Recovery Reconnectable Breakaway

For more than a decade, the 66CLP has earned the reputation as the industry standard in preventing fuel vapors from escaping during a separation incident on balance systems. Its proven design minimizes downtime and allows all hose points to be put back in service as quickly and easily as possible after a separation event. The OPW 66CLP is also approved for VST Phase II Enhanced Vapor Recovery Systems.

Features


- ◆ UL-listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
- ◆ Separates at 350 pounds of axial force.
- ◆ Push-back reconnect style.
- ◆ Durable, lightweight construction.
- ◆ Minimal pressure drop.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.


Ordering Specifications

Product #	Description
66CLP-5100	Vapor Poppeted Reconnectable Balance Breakaway
66CLP Instruction Sheet Order Number: F-70	

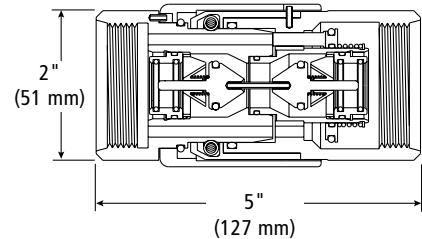

Replacement Parts

Product #	Description
204870	O-ring
204872	Spring
204811	Outer Cover

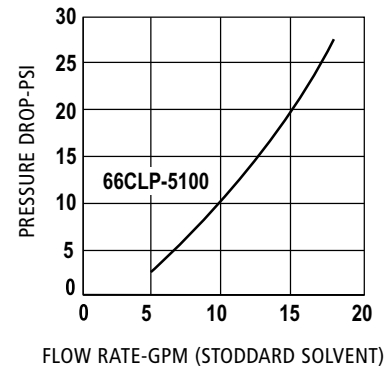

Listings and Certifications

CARB Certification Numbers	Executive Order VR-203-N (for Balance Phase II Enhanced Vapor Recovery (EVR) Systems Not Including In-Station Diagnostics (ISD))
	Executive Order VR-204-N (for Balance Phase II Enhanced Vapor Recovery (EVR) Systems Including In-Station Diagnostics (ISD) Systems)

**Listings and
Certifications**



CARB

California Air Resources Board