


ElectroTite Tank Sump

Introducing the latest OPW tank sump innovation from the engineering labs of FlexWorks and Fibrelite. ElectroTite is the most watertight system on the market. It ships factory installed with conduit ports and electrical wiring box – eliminating unnecessary tank sump leak points at site installation. No drill, no water, no sweat.

Materials:

Sump: Resin Transfer Molding (RTM) technology



Uses built-in electrical seal-offs

ElectroTITE
NO DRILL DRY SUMP TECHNOLOGY*
*Patent Pending

Features & Benefits:

Watertight:

- ◆ Reduces the number of entry and leak points into sump
- ◆ Sealed conduit threads on outside of sump – enter above water table
- ◆ Factory-installed fitting with proper torque guns, cutting tools and sealing compound

Versatile for Your Installation:

- ◆ UL-listed explosion-proof junction box allows space to re-route communication wires and loop additional sensors without entering sump
- ◆ Shield allows for high-voltage and sensor wires to be separated in the same box
- ◆ Conduits can be potted entering box, exiting box, or both using built-in electrical seal-offs

- ◆ UL-listed explosion-proof box is single-piece cast aluminum, with bolt-on access cover

Factory Installed:

- ◆ Eliminates the need to cut holes in sump for conduits
- ◆ No field-installed conduit penetrations

FXSX - X - XXXXXX

FCS = FibreTite Conduit Sump

M = Medium bury
D = Deep bury

FTS = FibreTite Tank Sump


Only available on FCS

1 = One ElectroTite Conduit Box
2 = Two ElectroTite Conduit Boxes

42 = 42" Sump Base Diameter
48 = 48" Sump Base Diameter

33 = 33" Sump Lid Diameter (WT-33)
37 = 37" Sump Lid Diameter (WT-37)

CR = Collar Ring Mount
SB = Solid Bottom

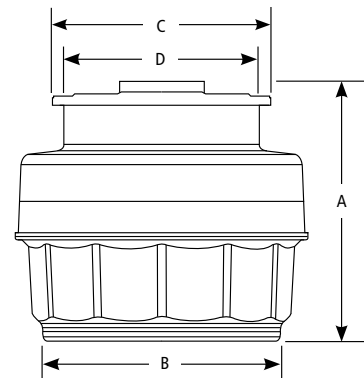

Ordering Specs

Model Number	Maximum Sump Height (A)	Minimum Sump Height (A)	Sump Base Diameter (B)	Sump Mount Design	Sump Lid Diameter (C)	Minimum Diameter Opening (D)	# of Conduit Boxes
FCSM-1-4233CR	46"	39"	42"	Collar Ring Mount	34.8"	29"	Single
FCSM-1-4233SB	46"	39"	42"	Solid Bottom	34.8"	29"	Single
FCSD-1-4233CR	53"	47"	42"	Collar Ring Mount	34.8"	29"	Single
FCSD-1-4233SB	53"	47"	42"	Solid Bottom	34.8"	29"	Single
FCSM-2-4233CR	46"	39"	42"	Collar Ring Mount	34.8"	29"	Dual
FCSM-2-4233SB	46"	39"	42"	Solid Bottom	34.8"	29"	Dual
FCSD-2-4233CR	53"	47"	42"	Collar Ring Mount	34.8"	29"	Dual
FCSD-2-4233SB	53"	47"	42"	Solid Bottom	34.8"	29"	Dual
FCSM-1-4837CR	46"	39"	48"	Collar Ring Mount	39.5"	34.6"	Single
FCSD-1-4837CR	53"	47"	48"	Collar Ring Mount	39.5"	34.6"	Single
FCSM-2-4837CR	46"	39"	48"	Collar Ring Mount	39.5"	34.6"	Dual
FCSD-2-4837CR	53"	47"	48"	Collar Ring Mount	39.5"	34.6"	Dual

Replacement Parts

Part Number	Sump Base Diameter	Part Number	Sump Base Diameter
FTSMBASE-42CR	42" Medium Bury Collar Mount Base	FTS-4233TH	Top Hat for 42" Base Sump (33" opening)
FTSMBASE-42SB	42" Medium Bury Solid Bottom Base	FTS-4237TH	Top Hat for 42" Base Sump (37" opening)
FTSDBASE-42CR	42" Deep Bury Solid Collar Mount Base	FTS-4837TH	Top Hat for 48" Base Sump (37" opening)
FTSDBASE-42SB	42" Deep Bury Solid Bottom Base	WT-33SL	33" Fibretite Sump Lid
FTSMBASE-48SB	48" Medium Bury Solid Base	WT-37SL	37" Fibretite Sump Lid
FTSMBASE-48CR	48" Medium Bury Collar Mount	FCS42-EX12	42" Diameter Sump 12" Extension
FTSDBASE-48CR	48" Deep Bury Collar Mount	FCS48-EX12	48" Diameter Sump 12" Extension