


## OPW 36S Hose Swivel

Designed for use with fuel oil nozzles (at inlet only), the OPW 36S provides 360° swivel action. The full-circle swivel reduces the physical strain of aligning the nozzle with the fillpipe.

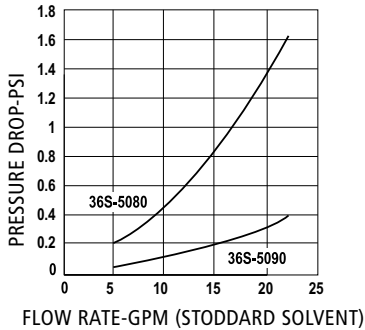

## Materials

**Body:** Aluminum

**Adaptor:** Zinc  
Aluminum

**Seals:** Buna-N O-Ring,  
Viton® O-Ring

**Bearings:** Nylon  UL Listed MH4542




36S-5080

## Ordering Specifications


Product Number	Inlet Thread x Outlet Thread	lbs.	kg
36S-5080	3/4" M x 3/4" F (NPT) (19 mm x 19 mm)	0.30	0.14
36S-5090	1" M x 1" F (NPT) (25 mm x 25 mm)	0.40	0.18

## OPW 25 Hose Swivel

Designed for use with fuel oil nozzles (at inlet only), the OPW 25 provides 360° swivel action. The full-circle swivel reduces the physical strain of aligning the nozzle with the fillpipe.

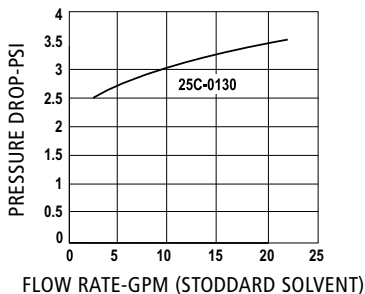

FLOW RATE-GPM (STODDARD SOLVENT)



FLOW RATE-GPM (STODDARD SOLVENT)

## Materials

**Body:** Electroless nickel-plated

**Bearings:** Molded plastic

**Seals:** Buna-N O-Ring,  
felt dust seal, Viton® O-Ring



25-0110

## Ordering Specifications

Product #	Inlet Thread		Weight	
	in.	mm	lbs.	kg
25-0110	1 1/4" (NPT)	32	0.95	.43
25-0120	1 1/2" (NPT)	38	1.06	.48
25C-0130*	1 1/4" (NPT)	32	0.95	.43

\*With Check Valve

## OPW 2" Single-Plane Hose Swivel

Durable brass construction with high flow rate.

## Materials

**Body:** Brass

**Seals:** Buna-N O-Rings



Product #	in.	mm	lbs.	kg
2-0055	2	50.8	1	.45

## OPW 295SRK

Designed for use on 25 Series swivels and 295 nozzles, the OPW 295SRK consists of a dust seal, 2 O-rings, 3 button-head screws, hex key and thread sealant.

## Materials

**Body:** Electroless nickel-plated

**Bearings:** Molded plastic

**Seals:** Buna-N O-Ring,  
felt dust seal, Viton® O-Ring

Product #	Description
295SRK-0001	25 and 295 Series 1", 1 1/4" NPT
295SRK-0002	25 and 295 Series 1 1/2" NPT