



## OPW 11A® AND 11B® Automatic Nozzles

The OPW 11® Series automatic nozzles are OPW's premium conventional nozzles for safe retail and commercial petroleum filling. The OPW 11® Series is the most trusted conventional nozzle in the world for full service use. The OPW 11B® Series is designed for use in retail and commercial filling applications including prepay, self and full service, credit/debit card readers or card-lock systems to help prevent gasoline spills. The OPW 11B® will not open until the pumping system is pressurized, and closes automatically when the pressure is removed.

## OPW 7H® AND 7HB® Automatic Shut-OFF Nozzles

### For Heavy-Duty, High-Flow Truck, Bus and Fleet Service

If you operate a full-service truckstop, refuel your own fleet or manage a card-lock refueling location, the low-cost, long-life and durability of the OPW 7H® high flow nozzle can help increase your productivity, sales and profits. The OPW 7HB® will not open until the pumping system is pressurized, and closes automatically when the pressure is removed.


## Listings and Certifications



See pages 301-302 for certification number

## Materials

- Body: Aluminum
- Lever & Lever Guard: Duratuff®
- Packing: Graphite with Teflon®
- Disc: Viton®
- Weight: 2.73 lbs. each, 43.1 lbs./case of 15  
1.25 kg each, 19.9 kg/case of 15

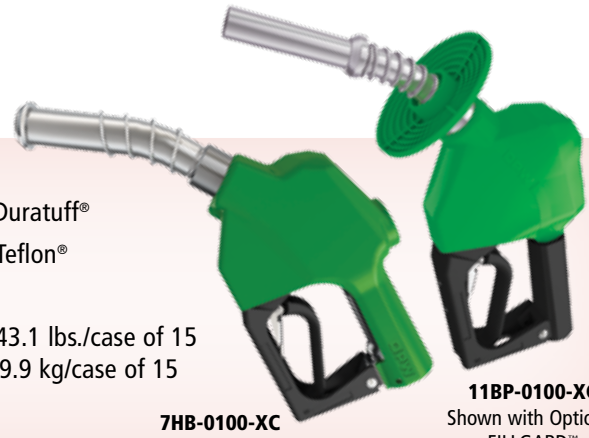

7HB-0100-XC

11BP-0100-XC  
Shown with Optional FILLGARD™

Nozzles (above) shown with optional hand insulator. Hand insulator not included.

## Features

### Safe for Use

- ◆ UL-Listed for use in gasoline, diesel, and up to 10% ethanol blends. Specific listings available at [www.opwglobal.com](http://www.opwglobal.com)
- ◆ Prevents gasoline and/or diesel spills in prepay or card lock systems utilizing OPW's unique No Pressure – No Flow Device. The nozzles cannot be opened until the pumping system is pressurized, and close automatically when the pressure is removed. (OPW 11B® and 7HB® Series Only)
- ◆ Prevents consumer from jamming the nozzle in an open position – Blocker on lever guard.
- ◆ FlowLock™ allows nozzle to shut-off when falling out of

a vehicle, and tipped up limiting spillage and unsafe conditions.

### Durable & Long Lasting Design

- ◆ Compatible to -54°C [-65°F]\*
- ◆ Cycle-tested and proven to last longer than 1 million cycles - Better than any other nozzle available on the market today\*
- ◆ Durable lever guard that won't scratch your customers' vehicles – Made from Duratuff®.
- ◆ New hold open clip spring lasts longer than previous designs. (OPW 11B® and 7HB® Series Only)
- ◆ Easy to use – Utilizing Accu-Stop® to-the-penny Flow Control Technology.

\* OPW internal lab testing results as of August 2010.

## Ordering Specifications

| Product #    | Description                                                    |
|--------------|----------------------------------------------------------------|
| 11B-0100-XC  | Extreme Cold Weather, 3/4" NPT Auto-Diesel Nozzle, 11B, Green  |
| 11B-0400-XC  | Extreme Cold Weather, 3/4" NPT Auto-Diesel Nozzle, 11B, Black  |
| 11B-0900-XC  | Extreme Cold Weather, 3/4" NPT Auto-Diesel Nozzle, 11B, Yellow |
| 11BP-0100-XC | Extreme Cold Weather, 3/4" NPT Gasoline Nozzle, 11BP, Green    |
| 11BP-0300-XC | Extreme Cold Weather, 3/4" NPT Gasoline Nozzle, 11BP, Red      |
| 11BP-0400-XC | Extreme Cold Weather, 3/4" NPT Gasoline Nozzle, 11BP, Black    |
| 7HB-0100-XC  | Extreme Cold Weather, 1" NPT Diesel Nozzle, 7HB, Green         |
| 7HB-0400-XC  | Extreme Cold Weather, 1" NPT Diesel Nozzle, 7HB, Black         |
| 7HB-0900-XC  | Extreme Cold Weather, 1" NPT Diesel Nozzle, 7HB, Yellow        |
| 66 REC-1000  | Cold Weather Breakaway – See page 165                          |
| 20S Series   | Cold Weather Swivel – See page 161                             |

## Replacement Parts

| Name                     | Product #    | Description                       | Used For:               |
|--------------------------|--------------|-----------------------------------|-------------------------|
| 11AK Leaded Spout Kit    | 5BS-2110XC   | 11A, 1 1/16" O.D. Leaded Spout    | 11AK Spout Replacement  |
| 11AKP Unleaded Spout Kit | 5BPS-2117XC  | 11AP, 1 3/16" O.D. Unleaded Spout | 11AKP Spout Replacement |
| 11B Leaded Spout Kit     | 5BBS-2135XC  | 11B, 1 5/16" O.D. Leaded Spout    | 11B Spout Replacement   |
| 11BP Unleaded Spout Kit  | 5BBPS-2137XC | 11BP, 1 3/16" O.D. Unleaded Spout | 11BP Spout Replacement  |

\*Beginning April 30, 2015; nozzles with Hold-Open clips must have a B-Cap no-pressure no-flow device or an Interlock feature to be UL2586 approved.