




## OPW 66FL Vac-Assist Flow Regulator

The OPW 66FL regulates flow to not exceed 10 gpm in vacuum-assist vapor recovery systems.

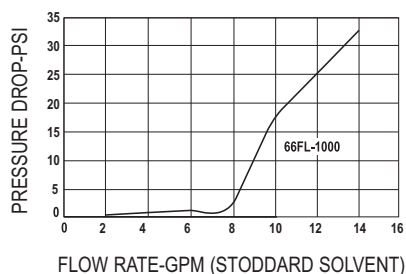

## OPW VAR75 CONVERTER VAC-ASSIST TO 3/4" NPT

Converts vacuum-assist nozzle to a conventional hose or a vacuum-assist dispenser for use with a conventional hose.



### Materials

Body: Aluminum

Seals: Buna-N

Weight: 1.0 lbs.,  
0.45 kg

66FL-1000




### Features

- ◆ UL listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at [www.opwglobal.com](http://www.opwglobal.com).
- ◆ The OPW 66FL-1000 is designed to be installed at the dispenser outlet, removing it from the abusive action seen at the nozzle end.
- ◆ A flow indication arrow is indicated on the flow limiter for easy installation.

### Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

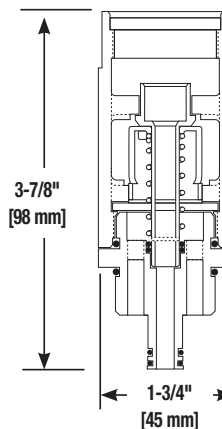

### Ordering Specifications

Part No.	Description
66FL-1000	Vac-Assist Flow Regulator

### Materials

Body: Aluminum

Seals: Buna-N

Weight: 0.75 lbs.,  
0.34 kg

VAR75



### Features

- ◆ Lightweight, maintenance free and easy to install.
- ◆ Adapts M-34 thread to a 3/4" NPT thread.

### Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

### Ordering Specifications

Part No.	Description
VAR75	Vac-assist to 3/4" NPT Conventional Converter

