

Materials

Body: Aluminum
Sleeve: Nylon, HDPE
Seals: Viton®
Spring: Stainless steel
Poppet: Aluminum
Weight: 1.3 lbs., 0.60 kg



66ISB-5100

Features


- ◆ UL and ULC listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at www.opwglobal.com.
- ◆ Breakaway separates at 350 pounds of axial force.
- ◆ 66ISB-5100 comes with vapor poppet.
- ◆ Swivel rotation of 360° in both planes.
- ◆ Push-back reconnect style.
- ◆ Easier reconnection at waist height.
- ◆ Extends hose life.
- ◆ Double O-rings at each joint.

Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.


OPW 66ISB Vacuum-Assist Stage II Vapor Recovery Reconnectable Swivel/Breakaways

Reconnectable, vapor poppeted Vacuum-Assist Swivel/Breakaways available. Designed for those who want to provide customers with the convenience of a 2-plane swivel and the added safety of a breakaway.

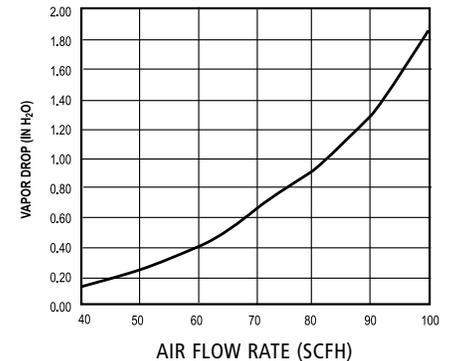

Ordering Specifications

Product #	Threads
66ISB-5100	M34 Metric Breakaway

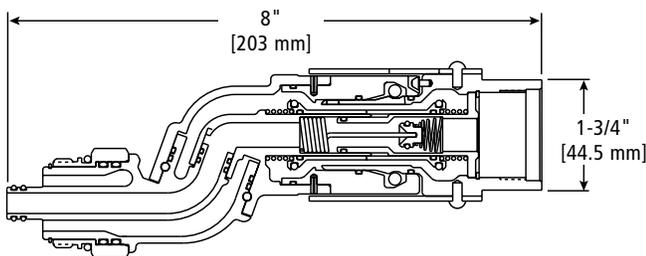

Listings and Certifications



CARB

California Air Resources Board

CARB Certified and UL Listed Per Standard 567.