
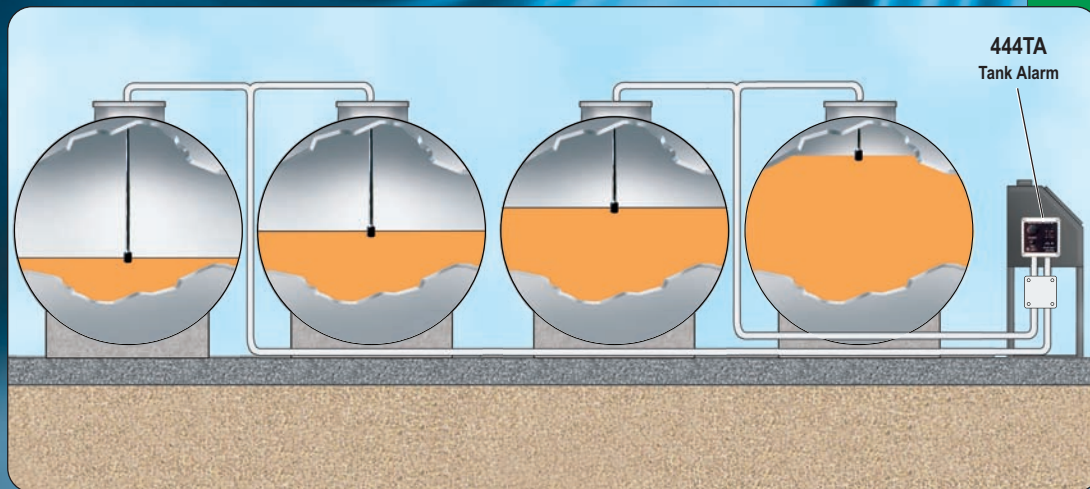


NEW

OPW 444TA

AST REMOTE FOUR SIGNAL TANK ALARM

- MULTIPLE FUNCTIONS AND COMBINATIONS ALL IN ONE UNIT
- ABILITY TO SEND A SIGNAL TO ANOTHER DEVICE
- SENSES UP TO FOUR DIFFERENT LIQUID LEVELS OR OTHER SIGNALS SIMULTANEOUSLY

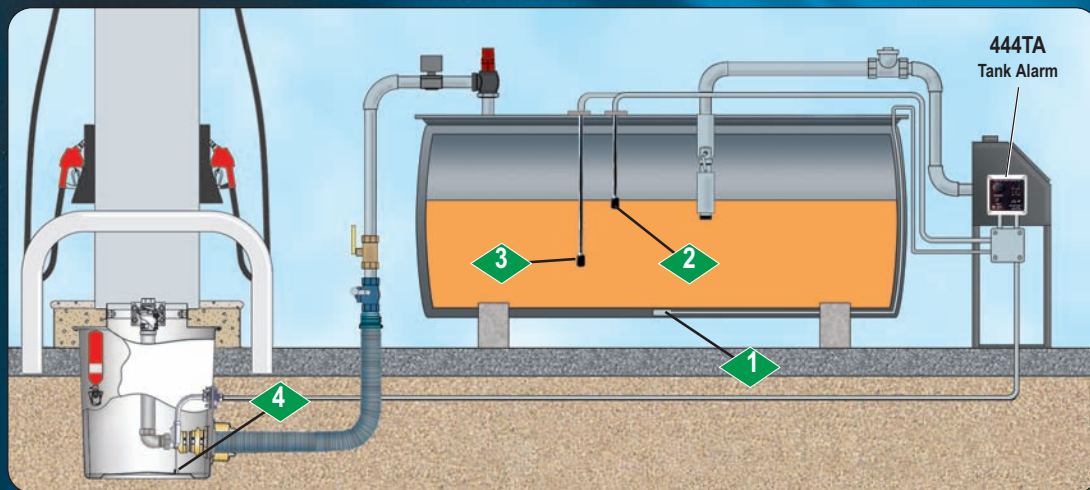

**MONITORS
UP TO
FOUR ALARM
SENSORS
PER TANK**

- 1 INTERSTITIAL SPACE MONITORING
- 2 LOW LEVEL MONITORING
- 3 HIGH LEVEL MONITORING
- 4 DISPENSER SUMP AND PAN MONITORING

**OR
FOUR TANKS
SIMULTANEOUSLY**


OPW

A DOVER COMPANY

OPW 444TA AST REMOTE FOUR SIGNAL TANK ALARM

The OPW AST Remote Four Signal Tank Alarm is designed to sense up to four different liquid levels or other signals using just one device. Audible and visual indicators are used to ensure reliable notifications. The 444TA also uses standard lithium battery powered for a long service life and can be easily maintained into the future.


- ◆ **Up to four alarm signals (444TA)** – That can be used for high or low liquid level sensing, interstitial monitoring, and/or other signals in one to four separate tanks.
- ◆ **Self-powered** – Lithium battery with a 10-year shelf life for long service life.
- ◆ **Audible Alarm** – Sounds a 90-decibel alarm at 4 feet away.
- ◆ **Visual Notifications** – Red alarm light will flash during use to notify the user. Low battery light indicates when battery needs replaced.
- ◆ **Corrosion-Resistant Construction** – Petroleum- and Environmental-resistant housing and all stainless steel pipe fitting ensure a long product life.
- ◆ **Product /Alarm Identification Label** – Located on top of the alarm for quick and easy identification, allowing you to correspond alarms to signals. Label has a protective covering.
- ◆ **Intrinsically Safe** – Complies with ANSI/UL 913 for Class 1, Division 1 & 2 for Groups C & D hazardous locations.
- ◆ **Cold Weather Resistant** – All components are safe for temperatures down to -40°F operation (and up to 120° F).
- ◆ **Long-Life Lithium Battery** – Self-powered by a lithium battery that includes a 10-year shelf life to ensure peace of mind for the owner.
- ◆ **Easy Installation** – Requires no calibration and installs easily into a 1" tank bung. **May be assembled remotely or directly on top of tank.**



TGTA-0400 4" Tank Bung Combo Fitting
Note: Drop Tube must be used with TGTA-0400.


Ordering Specifications:

Product #	Description	lb.	kg
444TA-0100	Four Signal Tank Alarm Box, No Float Switches	4	1.8
44TA-LLFS	36" Float Sub-Assembly	0	0.0
TGTA-0400	4" Tank Bung Gauge & Alarm Combo Fitting (OPW 61T required for use)	10	4.5



Dimensions:

	in.	cm
A	5 1/2	12.8
B	5 1/2	12.8
C	4 5/8	10.6




Replacement Parts:

Part #	Description
H15411M	Float Switch
H15937M	Battery Module
H15412M	Wire Grommet

Product Alarm

I.D. Label



444TA Instruction Sheet Order Number: 200655

Materials:

Enclosure: Polybutylene Terephthalate

Wire Grommet: Nylon w/ Buna Seal

Float Switch: Closed Cell Buna Float & Stainless Steel Rod

Pipe: Stainless Steel

Tank Adaptor: Aluminum Hardcoat Anodized

Approvals and Listings:



Conforms to ANSI / UL STD 913
Certified to CAN / CSA
STD C22.2 No. 157-92
Florida EQ-610



North America Toll Free – TELEPHONE: (800) 422-2525 ♦ Fax: (800) 421-3297 ♦ Email: domestic@opw-fc.com
International – TELEPHONE: (513) 870-3315 or (513) 870-3261 ♦ Fax: (513) 870-3157 ♦ Email: intl@opw-fc.com
www.opw-fc.com

♦ P.O. Box 405003 ♦ Cincinnati, OH 45240-5003 ♦ Printed in USA

IMPORTANT: OPW products should be used in compliance with applicable federal, state, provincial, and local laws and regulations. Product selection should be based on physical specifications and limitations and compatibility with the environment and materials to be handled. OPW MAKES NO WARRANTY OF FITNESS FOR A PARTICULAR USE. All illustrations and specifications in this literature are based on the latest product information available at the time of publication. OPW reserves the right to make changes at any time in prices, materials, specifications and models and to discontinue models without notice or obligation.

© 2008, OPW Fueling Components

© 2008 Delaware Capital Formation, Inc. All Rights Reserved. DOVER and the DOVER logo are registered trademarks of Delaware Capital Formation, Inc., a wholly-owned subsidiary of Dover Corporation.