




BlueLine

INTERNATIONAL FUEL PIPING

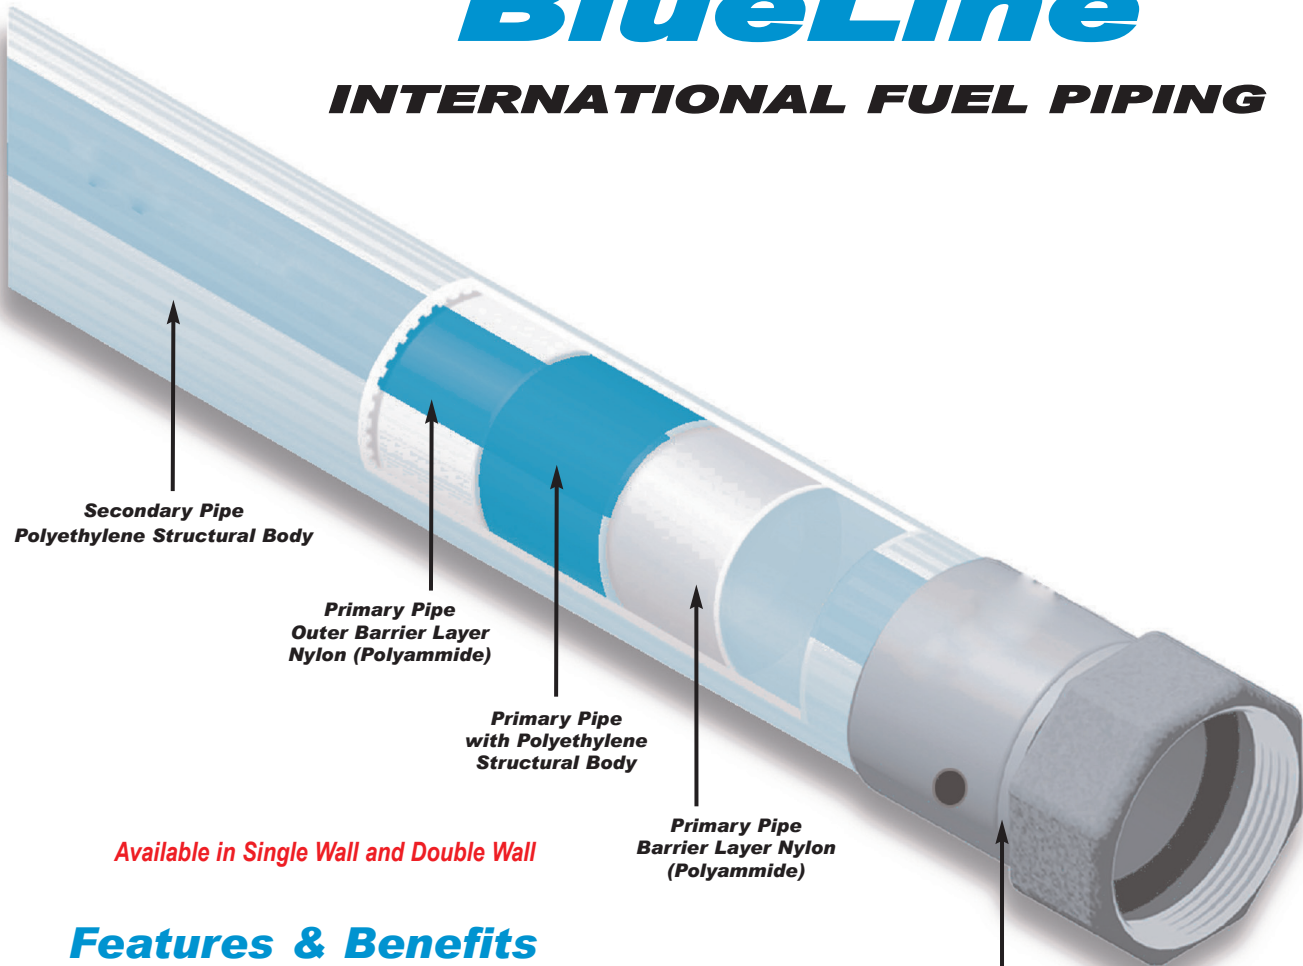

Secondary Pipe
Polyethylene Structural Body

Primary Pipe
Outer Barrier Layer
Nylon (Polyamide)

Primary Pipe
with Polyethylene
Structural Body

Primary Pipe
Barrier Layer Nylon
(Polyamide)

Available in Single Wall and Double Wall

Single or Double Wall
machined applied or
hand compressed fit-
tings

Features & Benefits

Fewer Joints: As piping runs are continuous, flexible piping has more than 50% fewer piping joints than rigid fiberglass, fusion and steel piping systems.

Contained Joints: As piping runs are continuous, all fitting connections can be made within a containment sump.

Faster Installation: BlueLine™ flexible piping is typically five (5) times faster to install than rigid piping systems.

Crack Resistant: BlueLine™ is a durable pipe that is resistant to cracking during shipping, installation, ground movement and surface loads.

Available Sizes

Single Wall: 1-1/2", 2", 3" and 4"

Double Wall: 1-1/2", 2", 3" and 4"