

# The 68EZSB Reconnectable Swivel Breakaway

**ORDER TODAY!**

Protective Nylon Sleeve Included  
Ships 20 Per Case

## Better Fueling for Customers, Easier Reconnection for Operators

The 68EZSB Reconnectable Swivel Breakaway delivers the fueling experience customers expect while providing the easy drive-off fix stations need.

Compared to single-plane swivels that force customers to fight the hose's natural bend, OPW multi-plane 68EZSB Swivel Breakaways rotate around multiple axes simultaneously, making the nozzle feel lighter and easier to operate.

Plus, reconnecting the two halves of the 68EZSB coupling after a drive-off is fast and easy. The 68EZSB requires only 5 lbs. of force to reattach the breakaway. The swivel-breakaway combo also eliminates the need for a whip hose, reducing both hardware maintenance and potential leak points.

### The 68EZSB Triple Advantage:

- ✓ Smooth Handling for Customers
- ✓ Fast & Easy Installation & Reconnection for Operators
- ✓ Fewer Dispenser Parts to Purchase, Maintain & Replace




Contact Your Area  
District Manager  
To Learn More.



## Materials

### 68EZSB-7575

**Body:** Aluminum  
**Sleeve:** Nylon  
**Seals:** Nitrile  
**Poppet:** Acetal, Aluminum  
**Packed:** 20 per Case

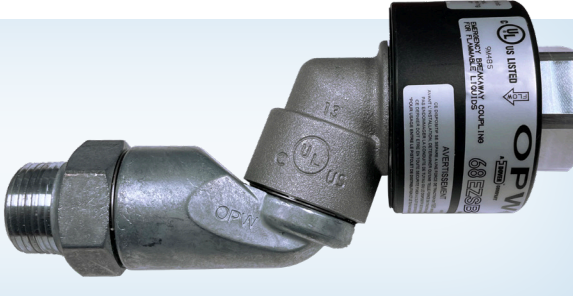


## Features

- ◆ New 68EZSB-7575 has enhanced swivel capability and is even easier to reconnect.
- ◆ UL and ULc-listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at [www.opwglobal.com](http://www.opwglobal.com).
- ◆ Pull Force – the 68EZSB will break away with a pull force of no more than 350 lbs.
- ◆ Easily Reconnected at Waist Height – after relieving line pressure, simply push coupling halves together until latched. Reconnection force is approximately 5 lbs for the 68EZSB.

- ◆ Protected Coupling and Poppet – the breakaway's poppet and sealing surface are protected from impact during separation by a plastic sleeve.
- ◆ Reduces Connections – the single-unit design replaces the standard swivel, breakaway and whip hose, eliminating possible leak points.

### Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

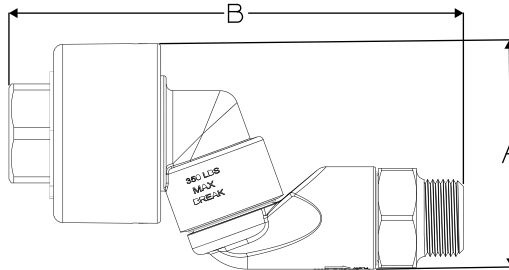

## Ordering Specifications

Product #	Size	Weight	
		lbs.	kg
68EZSB-7575	3/4" X 3/4" (NPT)	2	0.91

## Dimensions

Product #	A		B	
	in.	mm	in.	mm
68EZSB-7575	2.49"	64	6.31"	160

68EZSB Instruction Sheet Order Number: 216700

**Listings and Certifications** 

## OPW Swivel Breakaways

OPW Swivel Breakaways are intended for easy installation at the nozzle inlet. The compact, lightweight designs incorporate a 360° swivel rotation at both the male end and middle joint, with a simple and easily reconnectable breakaway on the opposite end.

