



## CivaControl™ II Air System

Rev. +, Oct 2009

Take control of your tank trailer air system operations with our new CivaControl™ II air control panels that can easily operate in the coldest conditions. These new lighter controls feature a modular design that reduces weight and complexity. Yet still makes it ready to handle your heavy duty Petroleum Operation day in and day out.

### Features

- Modular (Stackable) 3-2 Ported Valve Block Design
- Maximum pressure 150 PSI
- Aluminum Knob spaced for gloved operation
- Positive air reset / shut down feature ensures no valve is left open after shutting down the master valve
- High air flow in a small package ensures quick opening and fast shut down
- High endurance urethane seals rated at -40° F (-40° C)

### Safe Operation


- CivaControl™ II air system gives you the safety of sequenced air controls, that properly control the loading and unloading
- Master positive air shut down protects your tank and the environment by automatically closing all open valves
- Pressure gauge and vents open Indicator for that extra visual assurance and peace of mind

### Installation

- Easy to install, complete package installed on panel with DOT air fittings pre-installed
- Individual modular air blocks can also be purchased and assembled to suit your unique needs
- The complete panel incorporates pressure gauge, pop-up indicator, master control valve and stacked push/pull valves



SCP-5

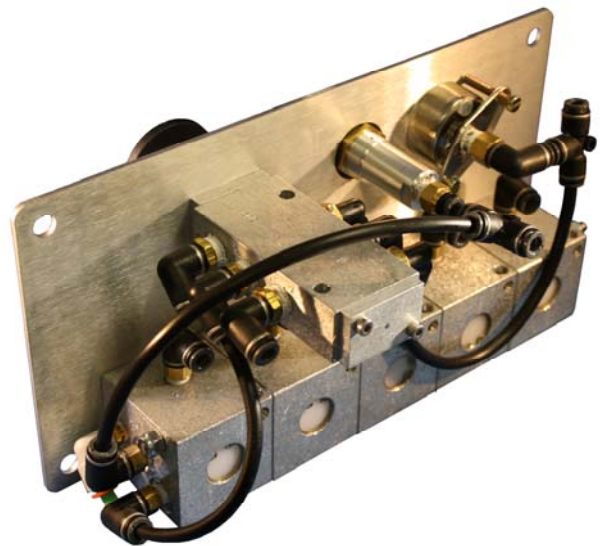

### Ordering Specifications

Number of Compartments	Part Number	Panel Length
1	12053-1	No Panel
2	SCP-2	13.5"
3	SCP-3	13.5"
4	SCP-4	13.5"
5	SCP-5	13.5"
6	SCP-6	17.5"
7	SCP-7	17.5"

# CivaControl™ II Air System

## Product Specifications

### Product Number

SCP-2 thru SCP-7 (Five Compartment is shown)

### Panel Dimensions:

Height - 7"

Width - 13.5" or 17.5"

Distance between knobs - 2"

### Materials:

Aluminum, Stainless Steel, Brass and Plastic

### Weight:


6.8 lbs. (3.09 kg) (As Shown)

### Operating Air Pressure:

90 -150 PSI

### Temp. Range:

-40°F to 160° F (-40° C to 70° C)

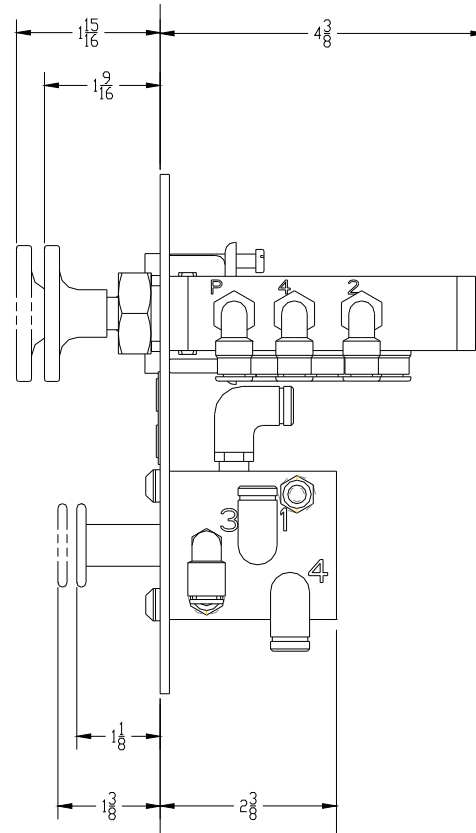


SCP-5 (Shown)

CivaControl II  
Modular Panel Assembly



12053-4 (Shown)

Four Position 3-2 Ported  
Modular Valve



12053-1

Single 3-2 Ported Valve



10711

3-2 Ported Pneumatic  
Emergency Shut Down  
Manual Push/Pull Valve



12071

5-2 Ported Pneumatic  
Master Shut Down  
Manual Push/Pull Valve



12069

Gauge  
1-1/2" Liquid Filled



9726

Pop-Up Indicator



PHONE: (816) 741-6600 • (888) 526-5657 • Fax: (816) 741-1061  
4304 Mattox Road • Kansas City, MO 64150 • [www.civacon.com](http://www.civacon.com)