

OPW CARB-Certified 14E ECO Enhanced Conventional Gasoline Nozzle



The OPW 14E ECO Enhanced Conventional Gasoline Nozzle is part of the new OPW 14 Series cleaner fueling experience nozzles, featuring innovative patented* dripless free-draining spout technology. Other dripless technologies capture fuel in the spout where it is allowed to evaporate and increase VOC emissions.

The new OPW 14E dripless-spout technology is designed to keep gasoline from dripping on your customers' hands, clothing, vehicles and the ground to provide a cleaner, greener, and more satisfying customer experience.

The CARB ECO OPW 14E utilizes a special interlock system inside the bellows to activate the flow of fuel.

CARB exec order in Listings and Certifications section of this catalog.

Dripless Nozzle Technology

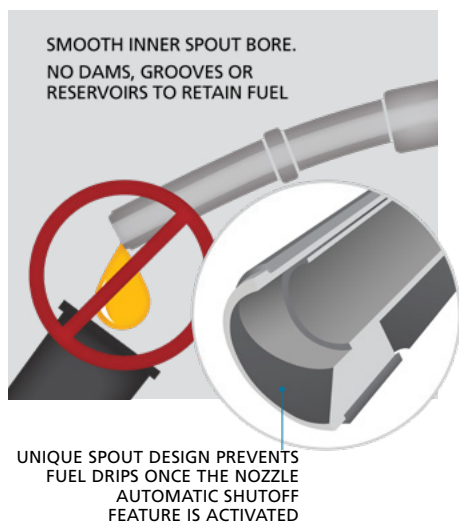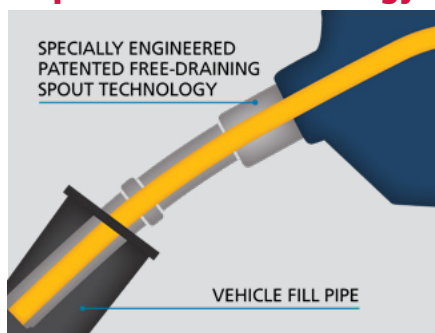

MATERIALS

- Body:** Aluminum
- Lever & Lever Guard:** Duratuff®
- Packing:** Graphite with Teflon®
- Disc:** Viton®
- Spout:** Aluminum with Stainless-Steel tip and Teflon®-coated inside
- Inlet Size:** 3/4" NPT
- Weight:** 2.73 lbs. each
1.25 kg each
- Case Count:** 10



The 14E is designed with an interlock to meet CARB requirements for dripless nozzles.

FEATURES & BENEFITS

Safe for Use

- ◆ True Dripless Technology* – patented dripless, free-draining spout with no dams or hidden reservoirs to catch liquid. Designed to exceed CARB dripless requirements.
- ◆ Rugged Durability – designed to meet the rigorous demands of high-volume sites.
- ◆ FlowLock™ allows nozzle to shut off when falling out of a vehicle or is tipped up, limiting spillage and unsafe conditions.
- ◆ Enhanced Drip Control (14E Models only) - specially designed interlock prevents fuel from flowing unless the spout is fully inserted in the vehicle fill pipe and the actuator is engaged. This is a CARB requirement.

Recently re-designed with new features, OPW 14E nozzles now include:

- ◆ A patented easy-open feature with a reduced opening force (US Pat: 12,227,408).
- ◆ A new ergonomically designed grip featuring a new barrel cover and lever.

Durable and Long-Lasting Design

- ◆ Cycle tested and proven to last longer than 1 million cycles.
- ◆ Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.

Cleaner Fueling Experience for Customers

- ◆ Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- ◆ Attractive two-piece hand-insulator which includes NEWGARD™ barrel cover and colored scuff guard, is the most comfortable nozzle in the industry to use.
- ◆ Convenient – one-finger hold-open clip that is easy to set the flow rate.

Design Working Pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

LISTINGS & CERTIFICATIONS



*US PATENTS 7,134,580 AND 9,126,820.
OTHER PATENTS-PENDING

ORDERING SPECIFICATIONS

Nozzle Color	14E Unleaded Nozzle
Green	14E-0100
Red	14E-0300
Black	14E-0400
Blue	14E-0500
Yellow	14E-0900

Scuff Guard Color	Product #
Black 14E Scuff Guard	209123
Green 14E Scuff Guard	214475
Red 14E Scuff Guard	214476
Blue 14E Scuff Guard	216905
14E Replacement Spout Kit	5BE-0100

Contact customer service for hose-assembly kits.