
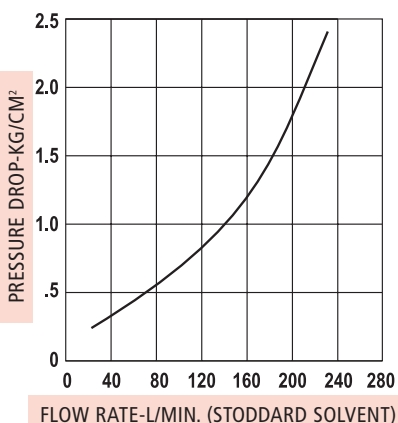


## OPW 7H® and 7HB® Automatic Shut-off Nozzles

### For Heavy-Duty, High-Flow Truck, Bus & Fleet Service

If you operate a full-service truck stop, refuel your own fleet or manage a card-lock refueling location, the low-cost, long-life and durability of the OPW 7H® high-flow nozzle can help increase your productivity, sales and profits.

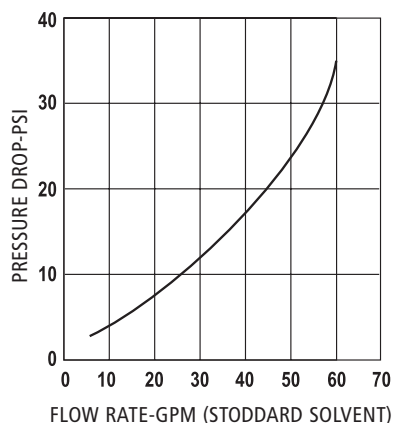

## Materials

**Body:** Aluminum  
**Lever & Lever Guard:** Duratuff®  
**Packing:** Graphite with Teflon®  
**Disc:** Viton®  
**Spout:** Aluminum  
**Inlet Size:** 1" NPT  
**Weight:** 3.35 lbs. each, 52.05 lbs./case of 15  
 1.51 kg each, 23.6 kg/case of 15



**FIRST to Meet NEW  
UL-2586 Requirements**

## Features

### Safe for Use

- ◆ UL- and ULc-Listed for use in gasoline, diesel and up to 10% ethanol blends. Specific listings available at [www.opwglobal.com](http://www.opwglobal.com).
- ◆ Prevents gasoline spills in prepay or card-lock systems utilizing OPW's unique No-Pressure - No-Flow Device. The nozzle cannot be opened until the pumping system is pressurized, and closes automatically when the pressure is removed. (7HB Series only)
- ◆ Prevents consumer from jamming the nozzle in an open position – blocker on lever guard.
- ◆ FlowLock™ allows nozzle to shut off when falling out of a fill pipe, and is tipped up, limiting spillage and unsafe conditions.
- ◆ Reliably low shut off – specifically designed to ensure proper automatic shut off as low as 5 gallons per minute.

### Durable and Long Lasting Design

- ◆ Cycle-tested and proven to last longer than 1 million cycles – better than any other nozzle available on the market today.\*

- ◆ Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.
- ◆ New hold-open clip spring lasts longer than previous designs.

### Appealing to Customers

- ◆ Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- ◆ Easy to open, even at high pressures, utilizing Dual Poppets.
- ◆ Even, smooth spray pattern – minimizes diesel foaming and false shut offs.
- ◆ Smooth closing action and reduced line shock from incorporated dashpot technology.
- ◆ Convenient – one-finger hold-open clip that is easy to set the flow rate. (not on all models)
- ◆ Spout Retaining Ring – adds extra measure in securing nozzle spout in fill pipe where required. (not on all models)

### Design working pressure

- ◆ 50 psi (3.45 bar) maximum pressure.

**\* OPW internal lab-testing results as of August 2010.**

## Listings and Certifications

